

Indoor Ambience Monitoring Sensor

Featuring **LoRaWAN**[®]



HAQ01/LW is a compact indoor ambience monitoring sensor for measurement of temperature, humidity and CO₂. These data will be shown on the E-ink screen in real-time, which allow to quantify the indoor environment and comfort.

Apart from screen display, sensor data can also be transmitted using LoRaWAN[®]. With this low-power technology, AM103 can work for more than 3 years with 2 replaceable batteries. Combining with Milesight LoRaWAN[®] gateway and Milesight Development Platform solution, users can manage all sensor data remotely.

HAQ01/LW can be used in office, store, classroom, hospital, etc.

◆ Features

- Integrated with multiple sensors like humidity, temperature and CO₂
- Visual data and clear emoticon to understand the comfort level easily via E-ink screen
- Smart hibernate mode schedulely to save battery power
- Equipped with traffic light indicator to indicate multi-level CO₂ threshold alarms
- More than 3 years work without replacing batteries
- Store locally historical records and support retransmission to prevent data loss
- Built-in NFC for easy configuration
- Compliant with standard LoRaWAN[®] gateways and network servers
- Quick and easy management with Milesight IoT Cloud and Milesight Development Platform

◆ Specifications

Wireless Transmission

Technology	LoRaWAN®
Antenna	Internal Antenna
Frequency	CN470/IN865/RU864/EU868/US915/AU915/KR920/AS923-1&2&3&4
Tx Power	16 dBm (868 MHz)/22 dBm (915 MHz)/19 dBm (470 MHz)
Sensitivity	-137dBm @300bps
Mode	OTAA/ABP Class A

Sensors

Temperature

Operating Principle	Digital CMOSens® technology (MEMS)
Range	-20°C ~ 60°C
Accuracy	Typ. ±0.3°C (-20°C ~ 0°C), ± 0.2°C (0°C ~ 60°C)
Resolution	0.1°C

Humidity

Operating Principle	Digital CMOSens® technology (MEMS)
Range	0% ~ 100% RH
Accuracy	Typ. ± 2% RH (25°C)
Resolution	0.5% RH

Carbon Dioxide (CO₂)

Sensor Type	Nondispersive Infrared (NDIR)
Range	400 to 5000 ppm
Accuracy	± (30 ppm + 3 % of reading) (0°C to +50°C)
Resolution	1 ppm

Others

Display	HAQ01/LW : 2.13-inch Black & White E-Ink Screen
Button	1 × Power/Reset Button
LED	1 × Traffic Light Status Indicator


Software

Power On/Off	Mobile App via NFC or Power Button
Configuration	Mobile App via NFC, Downlink
Advanced Features	Calibration, Threshold Alarm, Data Storage (640 entries), Data


	Retrievability, Data Retransmission, Screen Hibernate Mode, Smart Screen Mode
Physical Characteristics	
Power Supply	2 × 2700 mAh ER14505 Li-SOCl ₂ Replaceable Batteries
Battery Life (10 min interval, 25°C)	HAQ01/LW : Around 4.5 Years (SF7, EU868 & US915) Around 3 Years (SF10, EU868) Around 2.3 Years (SF10, US915)
Operating Temperature	-20°C to +60°C (E-Ink Screen: 0°C - 40°C)
Relative Humidity	0% to 95% (non-condensing)
Ingress Protection	IP30
Housing&Color	PC + ABS, White
Weight	182.5g (Batteries included)
Dimension	68 × 65 × 20.5 mm (2.68 × 2.56 × 0.81 in)
Installation	Wall Mounting via 3M Tape or Screws
Approvals	
Regulatory	CE, CE(RED), FCC, ISED
Environmental	RoHS

Note:


1. Accuracy corresponding to the temperature:

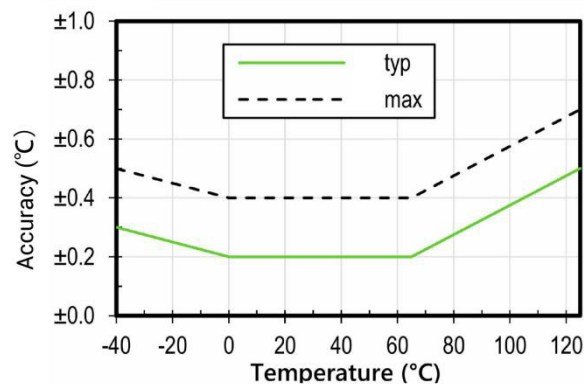

2. Accuracy corresponding to the relative humidity at 25°C:

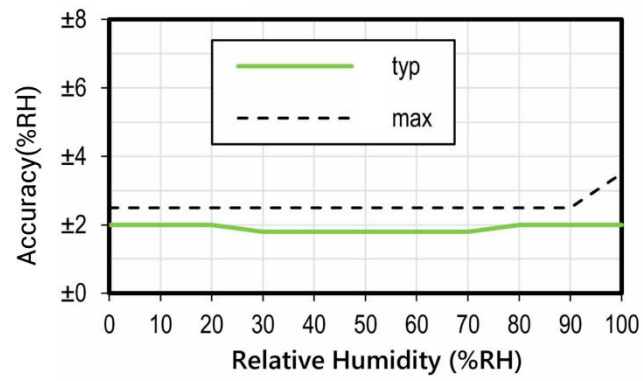

3. Typical RH accuracy corresponding to the temperature:

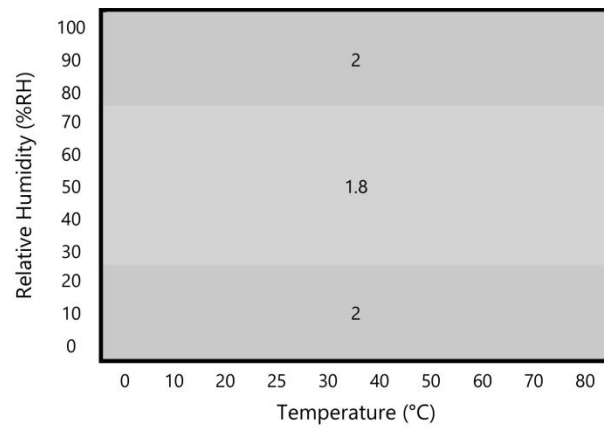

4. The battery life is tested under laboratory conditions and for guideline purposes only.

◆ Dimensions(mm)

