

HBTD8200D

Bluetooth-to-DALI Converter | Integrated 80mA PSU | Wall Junction Box

HYTRONIK[®]
POWERED BY **Koolmesh**[®]



Benefits

- Compact: Enabling easy junction box installation
- Smart: Converting Bluetooth control to DALI lighting
- Flexible: Allowing push switch & app setup

Applications

- Upgrading Existing DALI Lighting
- Bluetooth receiver node
- Compact Junction-box Installation

Check Out the Complete System Solution on the Website:
<https://www.hytronik.com/product/HBTD8200D>



LVD



RED

Product Description

HBTD8200D is a compact Bluetooth-to-DALI control module that brings smart Bluetooth Mesh commissioning and control to DALI luminaires via the Koolmesh system. Designed to fit into a junction box or electrical back box, it allows a standard retractive push switch to interface with a DALI system, enabling functions such as dimming, colour tuning, and scene recall. Suitable for both new-build and retrofit projects, it adds intelligent control to conventional lighting installations without replacing luminaires.

Functions and Features

See additional details at the end of datasheet



D4i Driver
Compatibility



DT6/DT8 Lighting
Control



Designed for
Junction Box
Installation



Koolmesh - See
bluetooth control
below



Live Energy &
Diagnostic Data
Part 252 / 253



Luminaire Asset
Data Part 251



Over load
Protection



Push-Button
Input



Short-circuit
Protection



nRF52840

HBT D8200D

Bluetooth-to-DALI Converter | Integrated 80mA PSU | Wall Junction Box

Specifications

Main Capabilities

Dimming (Output) Interface	DALI
Push Button Input	2

Electrical Data

Bluetooth Platform	Nordic nRF52840
Bluetooth frequency	2.4 GHz - 2.483 GHz
Bluetooth range (Phone to Device)	15-40m
Bluetooth range (Device to Device)	15-40m
Bluetooth transmit power	8 dBm
Bluetooth system	Koolmesh
Operating voltage range	220-240 VAC 50/60 Hz
Stand-by power (Psb)	<0.5W
DALI bus maximum rated current (I _n max)	130 mA
DALI bus nominal DC voltage range (Un)	15 V
DALI bus nominal current (I guaranteed)	80 mA

HBTD8200D

Bluetooth-to-DALI Converter | Integrated 80mA PSU | Wall Junction Box

Specifications

Technical	
Product weight	35.0 g
Product height	22.0 mm
Product length	46.0 mm
Product width	46.0 mm
Ambient temperature	-20 ~ +50 °C
Storage temperature	-40 ~ +70 °C
Humidity max	10 ~ 90%
Case Temp.max	75.0 °C
IP Rate	IP20


Standard	
EMC	EN 55015, EN 61000-3-2, EN61000-3-3, EN 61547
LVD	EN 61058-2-1
RED	EN 300328, EN 301489-1/-17, EN 50663

HBTD8200D

Bluetooth-to-DALI Converter | Integrated 80mA PSU | Wall Junction Box

HYTRONIK[®]
POWERED BY **Koolmesh**[®]


Technical Drawing

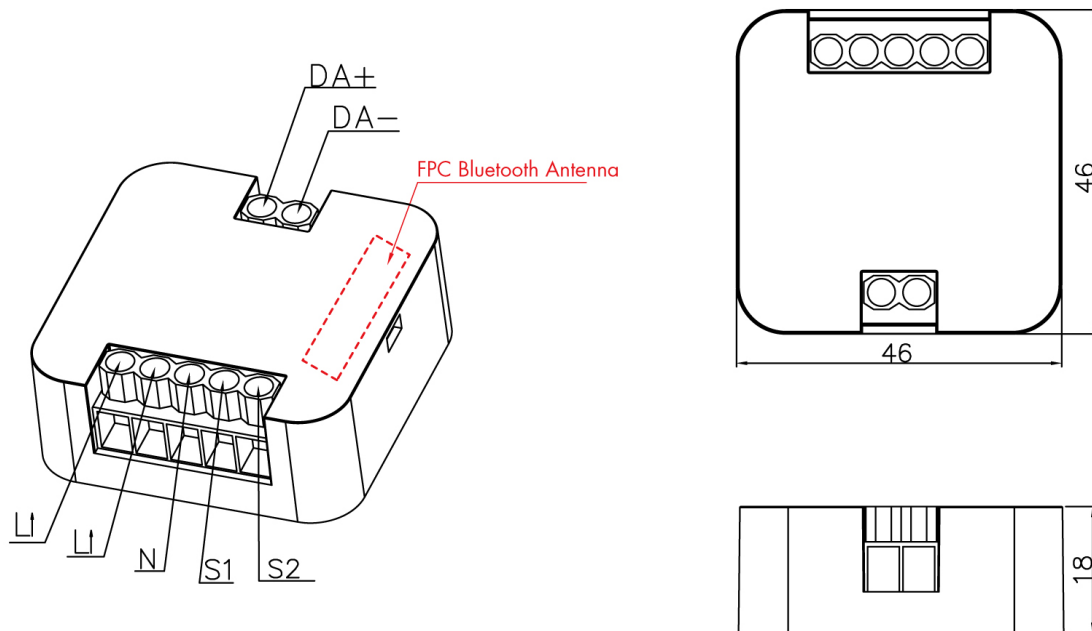

The Bluetooth antenna is located at the marked end of the device.

- Keep the antenna area clear of metal or conductive materials.
- Maintain at least 10 mm clearance around the antenna whenever possible for optimal wireless performance.
- Avoid installing the antenna section inside a metal enclosure or behind large metal structures.
- This product contains an internal FPC antenna. The antenna is attached to the inside of the housing. When opening the housing, separate the housing halves carefully to avoid pulling the antenna or damaging the antenna to PCB connection.

Application Example

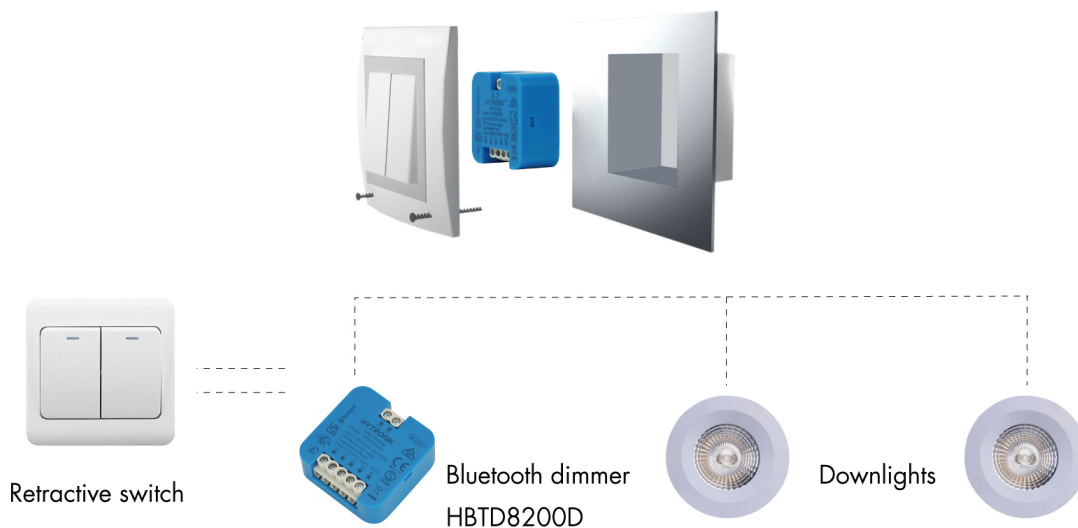

Commissioning Instructions and Precautions

A. Bluetooth Range Preparations

1. Device-to-device communication can extend up to 40m under indoor test conditions. In open outdoor environments, the transmission distance may be reduced due to fewer surrounding structures and signal reflections. Actual performance may vary depending on the installation environment.

B. Version Preparations

1. This datasheet applies to the nRF52840 version. Certain functions and specifications may differ between the nRF52840 and nRF52832 versions. For the nRF52832 version datasheet, please refer to the "Phased-out Products Library" in the Download section of our website, or contact our technical support team for further assistance.

C. App Feature Preparations

1. Features marked with green icons in the "Device-specific Koolmesh App Features" section are available only for the nRF52840 version.

D. DALI Bus Current Notes

Typical DALI bus current consumption per driver is approximately 2 mA. Before installation, calculate the total bus current consumption of all devices connected to the same DALI bus. Ensure that the total current consumption does not exceed the guaranteed supply current of the DALI bus power supply, and allow sufficient system margin.

Warning: For additional important documents, including installation precautions, product guidelines, and guarantee conditions, please refer to the official downloads.

<https://hytronik.com/service/downloads>

HBTD8200D

Bluetooth-to-DALI Converter | Integrated 80mA PSU | Wall Junction Box



Switch Input Function Configuration

The provided push switch interface supports commercially available non-latching (momentary) and latching wall switches when configured accordingly. Push switch functions can be configured via the Koolmesh App. For detailed information on connection, configuration and operation with Bluetooth sensors, dimmers and other compatible devices, please refer to the Bluetooth Device & Push Switch Application Guide.

Note: Single press, double press and press-and-hold actions can each be assigned to an individual function via the app. Once configured, each action triggers only its assigned function. A single action cannot activate multiple functions.

Switch function	Action	Description
Fire Alarm Function	Refer to https://support.koolmesh.com/	• Can be connected to a fire alarm system. • Once the fire alarm system is triggered, all luminaires controlled by the Push Switch will enter the preset scene (normally full ON). When the fire alarm system sends the end signal, all luminaires controlled by the Push Switch will return to normal operation.
ON/OFF Switch (Latching Switch)	/	• Upgrade a standard on/off control to Bluetooth control, enabling one latching switch to control multiple luminaires or zones while reducing wiring and the number of switches required.
Normal PUSH (Retractive Switch)	Single press (> 0.1s) Double press Press and hold (>= 1s)	• ON/OFF • ON only • OFF only • Recall this scene • Sensor take over • Not in use
Sensor-Link	/	• Hold time/scene • Stand-by time/scene • Upgrade a normal on/off motion sensor to a Bluetooth-controlled motion sensor

HBTD8200D

Bluetooth-to-DALI Converter | Integrated 80mA PSU | Wall Junction Box

HYTRONIK[®]
POWERED BY **Koolmesh**[®]

Koolmesh - Operating guide

Bluetooth



Smartphone(ios)



Smartphone (Android)



iPad



Web

For additional information, including project and network, device, and scenes, please refer to: <http://faq.koolmesh.com/>

Shared Koolmesh App Features

- | | |
|--|---|
|  Alert for excess lux / temperature / humidity via multi-meter HBLM01 |  Koolmesh Pro iPad for on-site configuration |
|  Astro timer (sunrise and sunset) |  Network sharing via QR code or keycode |
|  Bulk commissioning (copy and paste settings) |  Offline commissioning |
|  Compatible with Shelly energy metering |  One-key device replacement |
|  Continuous development in progress... |  Quick setup mode & advanced setup mode |
|  Device firmware update over-the-air (OTA) |  Remote control via Hytronik gateway & touch screen HPAD-TSJASE1 |
|  Device social relations check |  Scenes |
|  Different permission levels via authority management |  Schedule |
|  Floorplan feature to simplify project planning |  Staircase function for quick setup |
|  Grouping luminaires via mesh network |  Test mesh network connection quality |
|  Internet-of-Things (IoT) featured |  Web platform for project deployment & data analysis |

Device-specific Koolmesh App features

- | | |
|--|--|
|  3 DALI channels with independent control (under development) |  Partition control with HBTD8200P |
|  4 push inputs supported |  Push scene cycling |
|  Compatible with EnOcean kinetic switches |  Push switch configuration |
|  DALI & D4i failure email reporting |  Tri-level luminaire control |
|  Mesh OTA & remote commissioning (under development) | |

HBTD8200D

Bluetooth-to-DALI Converter | Integrated 80mA PSU | Wall Junction Box

Bluetooth Mesh Network Installation & Device Access Range

1. Phone/Pad to Device Range (Bluetooth Connection)


During commissioning, the installer must remain within Bluetooth range of the target device when adding it via the App.

2. Device to Device Range (Mesh Network Communication)

Once commissioned, devices communicate through the wireless mesh network. Users can access and control all devices within the network when connected to any active mesh node.

Note:

- Bluetooth range varies by product. Refer to the Specification section for details.
- Actual communication range may vary depending on product type, obstacles, environmental conditions, and luminaire construction.

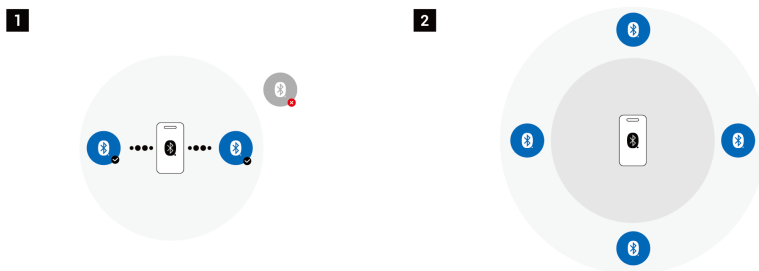

Bluetooth Network Components



HBGW02

Bluetooth Mesh Gateway | Ethernet or Wi-Fi 2.4GHz | wall/flat surface mounting
www.hytronik.com/product/HBGW02



HBGW02/D

Bluetooth Mesh Gateway | Dual-band Wi-Fi | wall/flat surface mounting
www.hytronik.com/product/HBGW02-D



HBGW03/R

BACnet Gateway | Dual-band Wi-Fi or Ethernet | DIN rail/wall/flat surface mounting
www.hytronik.com/product/HBGW03-R



HBKS01/W

Bluetooth Kinetic Switch | One-gang | Wireless Control
www.hytronik.com/product/HBKS01-W



HBKS01D/W

Bluetooth Kinetic Switch | Single Rocker | White Color
www.hytronik.com/product/HBKS01D-W



HBKS02/W

Bluetooth Kinetic Switch | Two-gang | White Color
www.hytronik.com/product/HBKS02-W



HBKS02D/W

Bluetooth Kinetic Switch | Double Rocker | White Color
www.hytronik.com/product/HBKS02D-W



HBKS03/W

Bluetooth Kinetic Switch | Three-gang | White Color
www.hytronik.com/product/HBKS03-W



HBLM01

Multi-meter | Bluetooth & NFC | Lux Measurements
www.hytronik.com/product/HBLM01



HPAD-TSJASE1

Bluetooth Touch Tablet | Gateway Integrated | Switch Boxes
www.hytronik.com/product/HPAD-TSJASE1

HBTD8200D

Bluetooth-to-DALI Converter | Integrated 80mA PSU | Wall Junction Box

HYTRONIK[®]
POWERED BY **Koolmesh**[®]

Functions and Features



D4i Driver Compatibility

Designed to operate with D4i-certified drivers within D4i luminaires, supporting standard DT6 / DT8 control behaviour in D4i systems.



DT6 / DT8 Lighting Control

Supports DT6 (single-channel dimming) and/or DT8 (tunable white / colour) lighting control via DALI, enabling brightness and colour temperature adjustment based on control logic such as occupancy or daylight.



Designed for Junction Box Installation

This product is designed for installation inside a standard junction box, offering a clean and integrated mounting solution for lighting control applications. The compact design allows secure fitting and straightforward wiring within the junction box, simplifying on-site installation while ensuring reliable electrical connections for both new installations and retrofit projects.



Live Energy & Diagnostic Data Part 252 / 253

Koolmesh can wirelessly read live operating data from D4i drivers, or compatible DALI drivers with Part 252 / 253 implemented. Readable data may include real-time power (W), energy consumption (kWh), voltage (V), current (mA), power factor, operating hours (burn hours), driver temperature, start counters and LED failure flags (open/short circuit).

For standard DALI-2 DT6/DT8 drivers, Koolmesh can read the data points made available by the driver, with the actual retrievable data depending on the driver's supported functions.



Luminaire Asset Data Part 251

Koolmesh can read Part 251 luminaire asset data where available, such as GTIN, serial number, manufacturing date, luminous flux, colour temperature and manufacturer ID. The information must be pre-written into Memory Bank 1 by the luminaire OEM or driver manufacturer. If left unconfigured, related fields may be blank or unavailable.



Over load Protection

This product incorporates overload protection that limits or disables the output when the connected load exceeds the rated capacity. This protection helps prevent overheating, excessive component stress and unstable operation, ensuring safe and reliable system performance.



Push Button Input

This product integrates push-button (momentary switch) inputs, allowing external potential-free switches to trigger basic lighting control functions. Each input can be configured for actions such as on/off switching, dimming or scene recall, providing flexible manual control and user interaction within the lighting system. The push-button inputs operate independently of the sensor's automatic functions, enabling seamless coexistence of manual and sensor-based lighting control.



Short-Circuit Protection

This product incorporates short-circuit protection that automatically disables the output in the event of a short circuit. Normal operation is restored automatically once the fault condition is removed, protecting the device and connected components from damage.

HBTD8200D

Bluetooth-to-DALI Converter | Integrated 80mA PSU | Wall Junction Box

HYTRONIK®
POWERED BY **Koolmesh**®

Functions and Features



nRF52840

Powered by Nordic nRF52840 Bluetooth® 5.0 SoC, the product delivers enhanced memory capacity and processing performance for advanced Bluetooth Mesh lighting applications. The larger Flash and RAM resources support OTA updates, complex commissioning, diagnostics, and future firmware expansion. External EEPROM provides reliable storage for configuration data, network parameters, and device settings, ensuring stable operation and easy maintenance.

Check out for further explanation of features

<https://hytronik.com/solutions/lighting-control-features>