

Detached Motion Sensor with  Bluetooth® 5.0 SIG Mesh

HC438V/BT **HCD438/BT**
0/1-10V Output DALI Output



Product Description

HC438V/BT is a Bluetooth 0/1-10V control base whereas HCD438/BT is a Bluetooth DALI control base with 30mA DALI power supply built in. They work with a wide range of microwave and PIR sensor heads. They are ideal for plastic luminaires as compared to metal luminaires because Bluetooth signal can transmit through plastic. They are suitable for any typical indoor applications such as office, classroom, car park, warehouse and other commercial/industrial areas. With Bluetooth wireless mesh networking, it makes communication much easier without any hardwiring, which eventually adds values to luminaires and saves costs for projects. Meanwhile, simple device setup and commissioning can be done via **Koolmesh™** app.




App Features

-  Quick setup mode & advanced setup mode
-  Tri-level control
-  Daylight harvest
-  Circadian rhythm (Human centric lighting)
-  Floorplan feature to simplify project planning
-  Web app/platform for dedicated project management
-  Koolmesh Pro iPad version for on-site configuration
-  Grouping luminaires via mesh network
-  Scenes
-  Detailed motion sensor settings
-  Dusk/Dawn photocell (Twilight function)
-  Push switch configuration
-  Schedule to run scenes based on time and date
-  Astro timer (sunrise and sunset)
-  Staircase function (master & slave)
-  Internet-of-Things (IoT) featured
-  Device firmware update over-the-air (OTA)
-  Device social relations check
-  Bulk commissioning (copy and paste settings)
-  Dynamic daylight harvest auto-adaptation
-  Power-on status (memory against power loss)
-  Offline commissioning
-  Different permission levels via authority management
-  Network sharing via QR code or keycode
-  Remote control via gateway support HBGW01
-  Interoperability with Hytronik Bluetooth product portfolio
-  Compatible with EnOcean switch EWSSB/EWSDB
-  Continuous development in progress...

Hardware Features

-  HC438V/BT: 0/1-10V output with:
200VA~120V / 400VA~277V (capacitive)
500W~120V / 1200W~277V (resistive)
-  HCD438/BT: 30mA DALI broadcast output for up to 15 LED drivers
-  Plug'n'Play for flexible installation and cost saving assemble
-  Support to control DT8 LED drivers (HCD438/BT)
-  Support D4i driver and collect energy, fault & diagnostics data (HCD438/BT)
-  2 Push inputs for flexible manual control (HCD438/BT)
-  Zero crossing detection circuit to reduce in-rush current and prolong relay lifetime (HC438V/BT)
-  Loop-in and loop-out terminals for efficient installation (HC438V/BT only)
-  5-year warranty

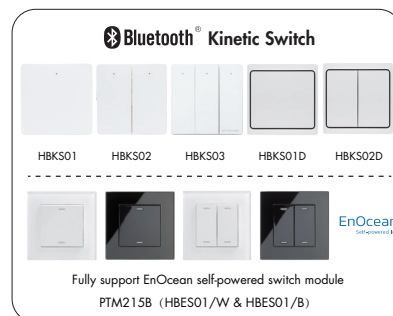

Technical Specifications (HC438V/BT HCD438/BT)



Bluetooth Transceiver	
Operation frequency	2.4 GHz - 2.483 GHz
Transmission power	4 dBm
Range (Typical indoor)	10~30m
Protocol	 Bluetooth® 5.0 SIG Mesh
Safety and EMC (Common Data)	
Safety standard	UL773A , CSA-C22.2 No. 284
FCC standard	FCC Part 15C
Certificate	UL, CUL, FCC
Environment	
Operation temperature	Ta: -20°C ~ +55°C
Case temperature (Max.)	Tc: +75°C
IP rating	IP20

Input & Output Characteristics	
Operating voltage	120~277V~50/60Hz
Stand-by power	<1W
Load ratings: HC438V/BT	Capacitive: 200VA~120V / 400VA~277V Resistive: 500W~120V / 1200W~277V
Max withstandable in-rush current:HC438V/BT	80A@160μs
HCD438/BT	30mA (max. 15 devices)
Warming-up	20s



* The Max withstandable in-rush current tested under 50% I_{peak} / 230Vac

Mechanical Structure & Dimensions



HC438V/BT (0/1-10V output)

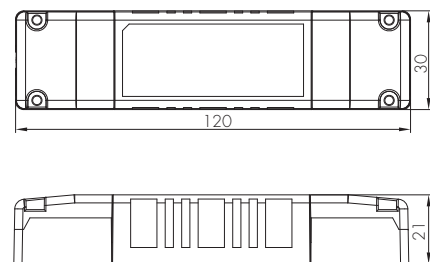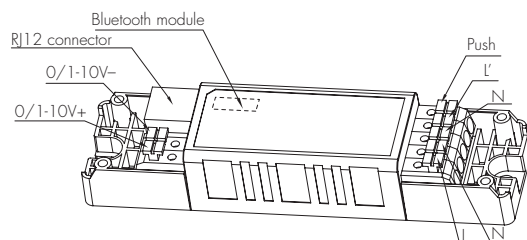

HCD438/BT (DALI output)

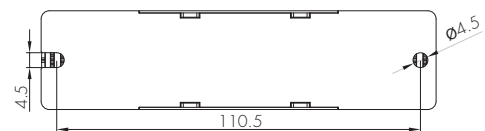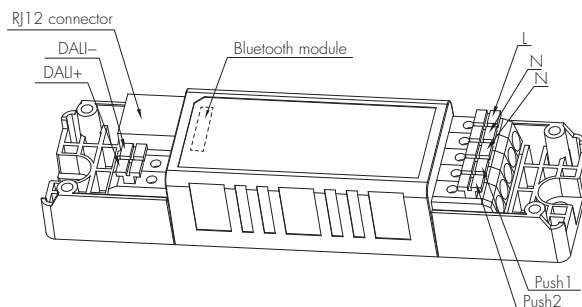

Wire Preparation




To make or release the wire from the terminal, use a screwdriver to push down the button.


1. 200 metres (total) max. for 1mm² CSA (Ta = 50°C)
2. 300 metres (total) max. for 1.5mm² CSA (Ta = 50°C)

Wiring Diagram

HC438V/BT

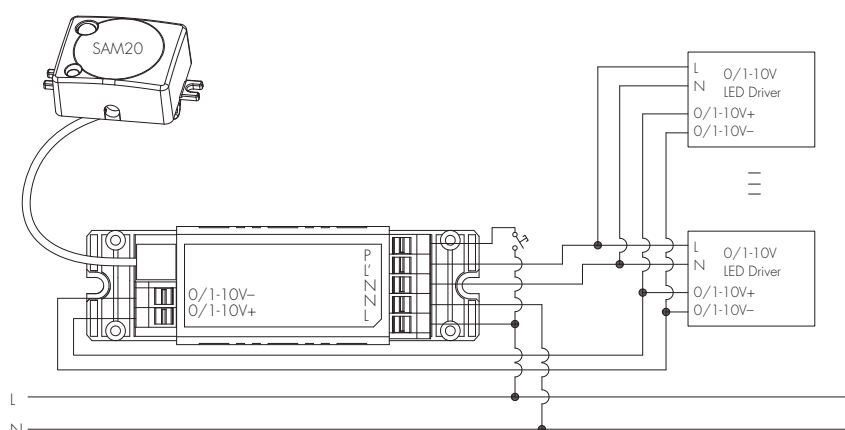

HCD438/BT

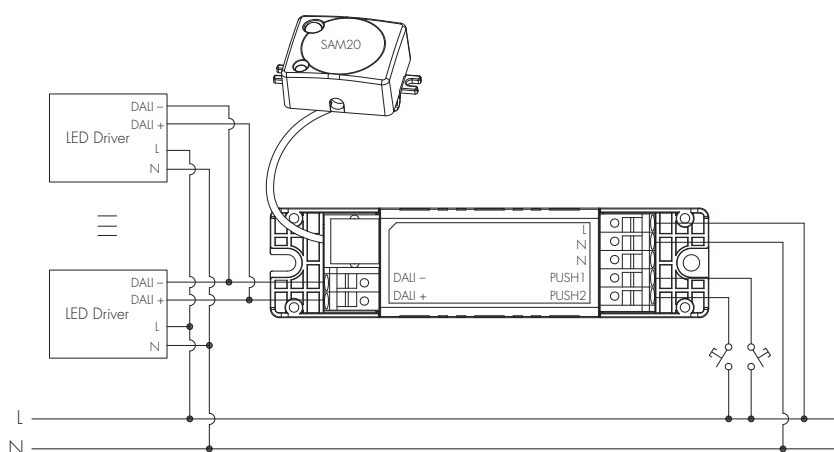

Technical Specifications for Sensor Heads

PIR Sensor Properties	
Sensor principle	PIR detection
Operating voltage	5VDC
Detection range *	HIRO5 & HIRO5/FM & HIRO7 Max installation height: 3m Max detection range (Ø): 6m
	HIR11 Max installation height: 15m (forklift) 12m (single person) Max detection range (Ø): 24m
	HIR12 Max installation height: 15m (forklift) 12m (single person)
	Max detection range: 18m * 6m (L * W)

HF Sensor Properties	
Sensor principle	High Frequency (microwave)
Operating voltage	5VDC
Operation frequency	5.8GHz +/- 75MHz
Transmission power	<0.2mW
Detection range *	SAM20 / SAM21 / SAM22 Max installation height: 3m Max detection range (Ø): 12m
	SAM23 Max installation height: 15m (forklift) 12m (single person)
	Max detection range (Ø): 20m
	HIR63 Max installation height: 3m (single person) Max detection range (Ø): 12m
	HIR63/R Max installation height: 8m (single person) Max installation height: 12m (forklift) Max detection range (Ø): 14m


* The detection range is heavily influenced by sensor placement (angle) and different walking paces.
It may be reduced under certain conditions.

PIR & microwave sensor heads

The range of PIR and microwave sensor heads below offers powerful number of Plug'n'Play feature options to expand the flexibility of luminaire design. This approach to luminaire design reduces space requirements and component costs whilst simplifying production.


A. HIRO5

PIR sensor head
The cable length is around 30cm.

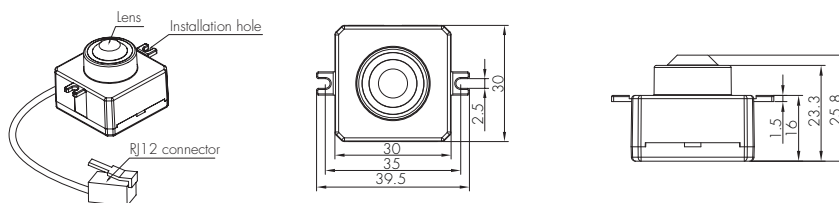


B. HIRO5/FM

PIR sensor head
The cable length is around 65cm.

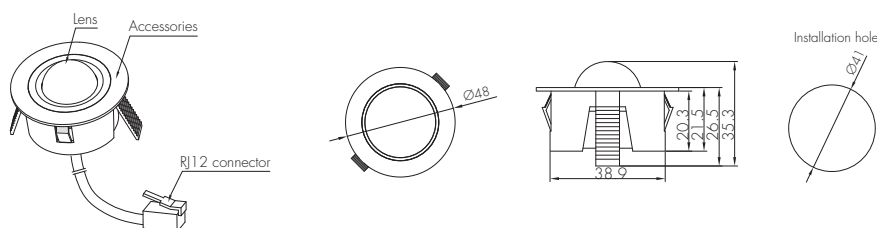


C. HIRO7

PIR sensor head
Photocell Advance™
The cable length is around 30cm.

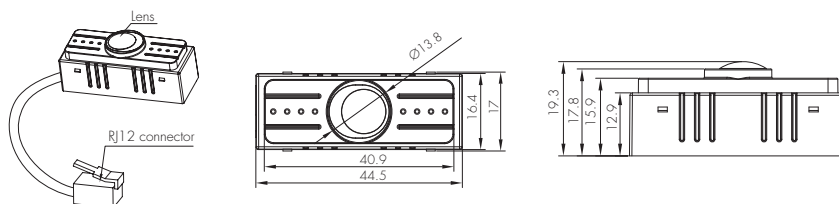


D. HIR11/S

PIR sensor head
Surface mounting
For highbay application
Lens part IP42 (IP64 can be made upon request)
The cable length is around 30cm.

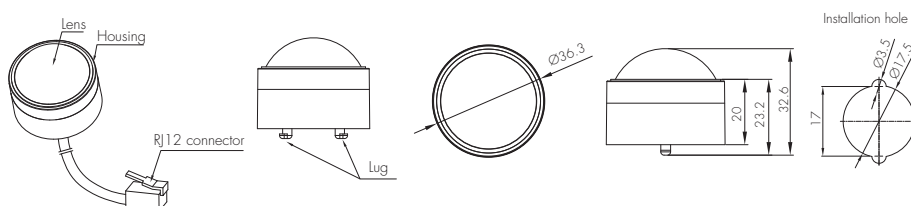


E. HIR11/F

PIR sensor head
Flush mounting
For highbay application
Lens part IP42 (IP64 can be made upon request)
The cable length is around 30cm.

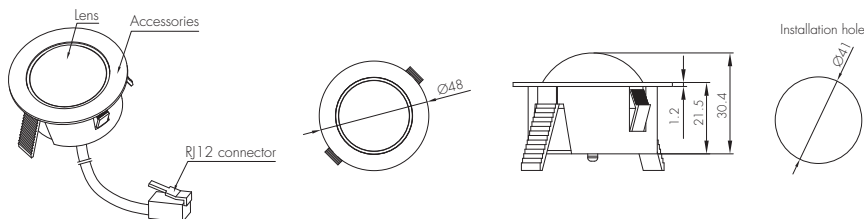


F. HIR11/C

PIR sensor head
Screw to the luminaire by conduit
For highbay application
Lens part IP42 (IP64 can be made upon request)
The cable length is around 30cm.

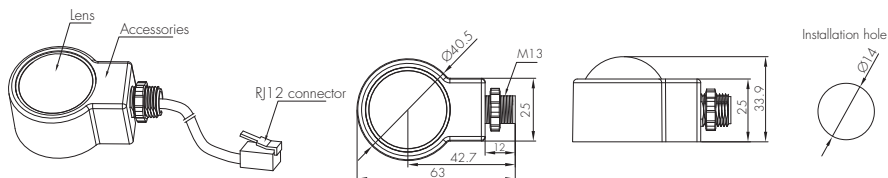

G. HIR12

PIR sensor head
For highbay application
IP65(lens part)
The cable length is around 30cm.

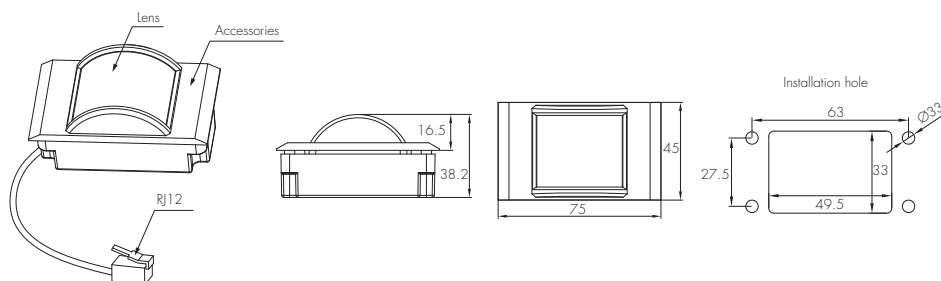


Installation for HIR12



We suggest that the metal plate thickness to be 0.8mm~1.6mm to ensure perfect focal length for the PIR lens.


H. SAM20

HF sensor head
Photocell Advance™
The cable length is around 30cm.

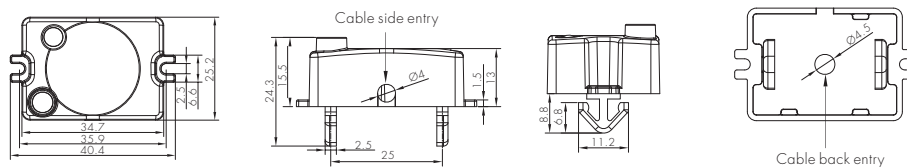


I. SAM21

HF sensor head
IP65
The cable length is around 30cm.

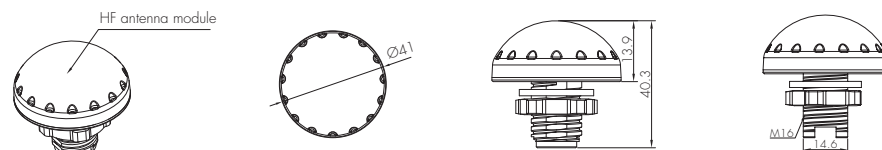


J. SAM22

HF sensor head
Flush mount
The cable length is around 30cm.

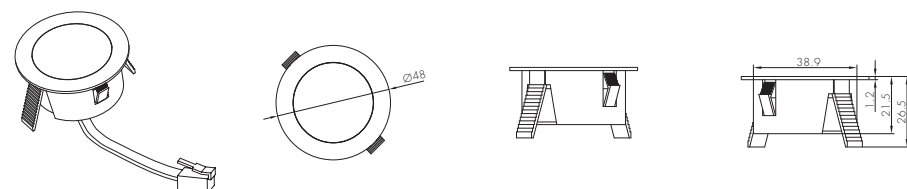


K. SAM23

HF sensor head
Photocell advance™
Daylight sensor
For highbay application
The cable length is around 30cm.

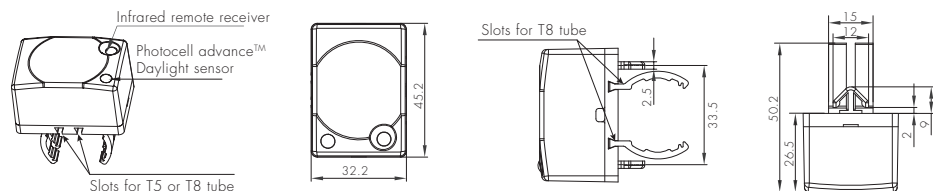


L. HIR63

PIR sensor head
The cable length is around 30cm.

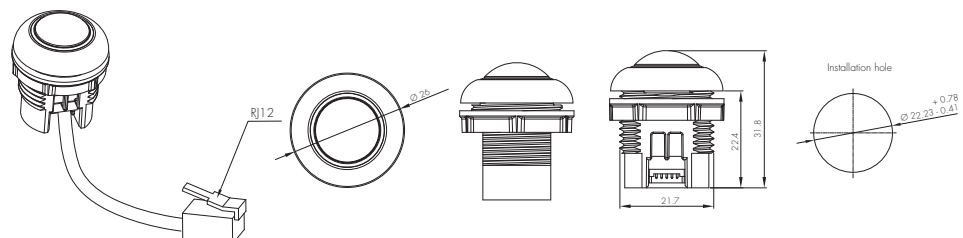


M. HIR63 with HA04

PIR sensor head
Optional accessory
The cable length is around 30cm.

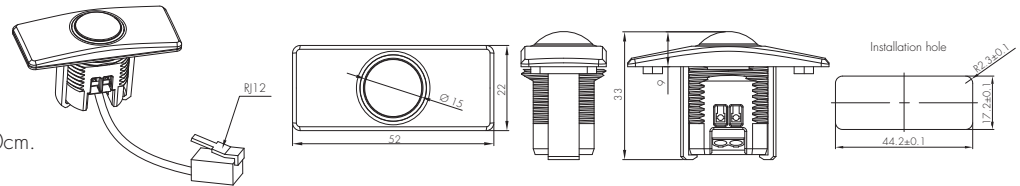


N. HIR63 with HA05

PIR sensor head
Optional accessory
The cable length is around 30cm.

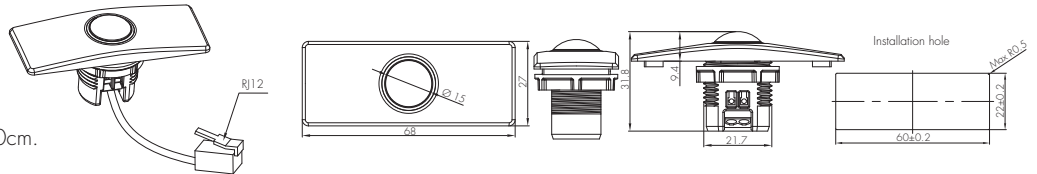

O. HIR63/R

PIR sensor head
IP65 (facia / lens part)
The cable length is around 30cm.


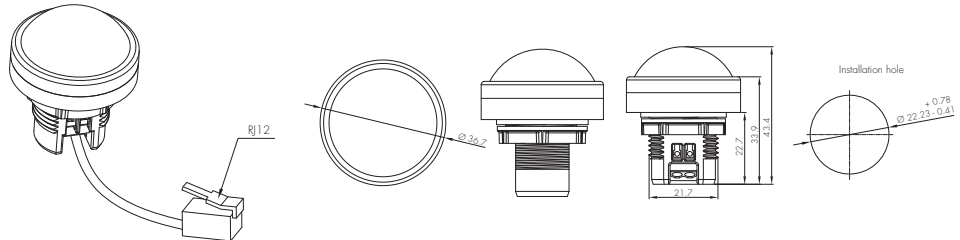


Optional Accessory: Reinforced Bluetooth Antenna



For some special applications, customers may need a larger Bluetooth transmission for both smartphone to device and device to device. Thanks to the reinforced Bluetooth antenna (optional black or white color to choose from), with it being added to the control base HC438V/BT & HCD438/BT, the transmission distance (smartphone to device) enlarges to 20m, the distance of device to device is around 50m.



HA01B

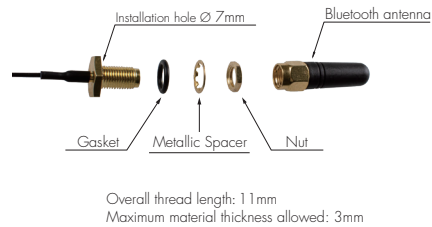


HA01W

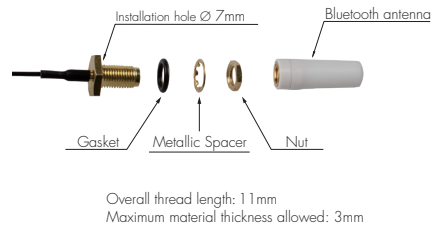

Installation Method



Solder the antenna to the Bluetooth module




Drill a 7mm hole in the fixture
Assemble the antenna parts in turn




Make sure the antenna head is outside the fixture





Detection Pattern

SAM23

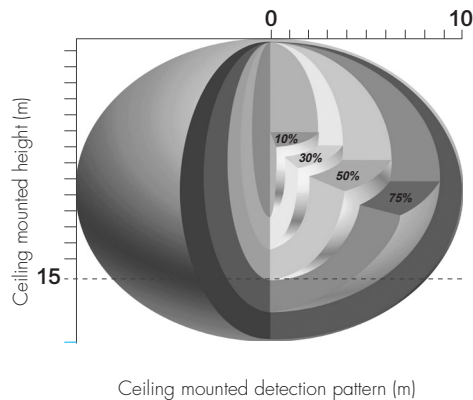


SAM20 / SAM21 / SAM22

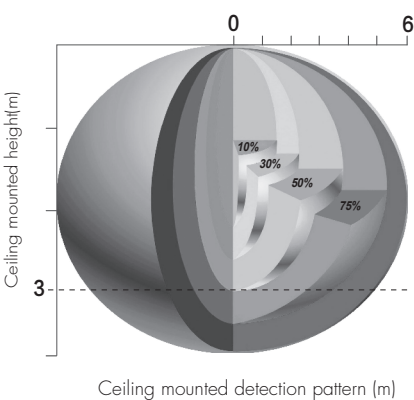


HIR11 (High-bay)				
		HIR11: High-bay lens detection pattern for forklift @ Ta = 20°C (Recommended installation height 10m-15m)		
A: Tangential movement 	B: Radial movement 	Mount height	Tangential (A)	Radial (B)
		10m	max 380m² (Ø = 22m)	max 201m² (Ø = 16m)
		11m	max 452m² (Ø = 24m)	max 201m² (Ø = 16m)
		12m	max 452m² (Ø = 24m)	max 201m² (Ø = 16m)
		13m	max 452m² (Ø = 24m)	max 177m² (Ø = 15m)
		14m	max 452m² (Ø = 24m)	max 133m² (Ø = 13m)
		15m	max 452m² (Ø = 24m)	max 113m² (Ø = 12m)
		HIR11: High-bay lens detection pattern for single person @ Ta = 20°C (Recommended installation height 2.5m-12m)		
A: Tangential movement 	B: Radial movement 	Mount height	Tangential (A)	Radial (B)
		2.5m	max 50m² (Ø = 8m)	max 7m² (Ø = 3m)
		6m	max 104m² (Ø = 11.5m)	max 7m² (Ø = 3m)
		8m	max 154m² (Ø = 14m)	max 7m² (Ø = 3m)
		10m	max 227m² (Ø = 17m)	max 7m² (Ø = 3m)
		11m	max 269m² (Ø = 18.5m)	max 7m² (Ø = 3m)
		12m	max 314m² (Ø = 20m)	max 7m² (Ø = 3m)


HIRO5 / HIRO7

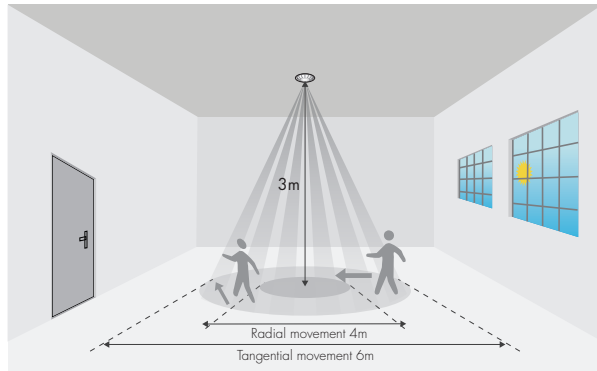


HIR12

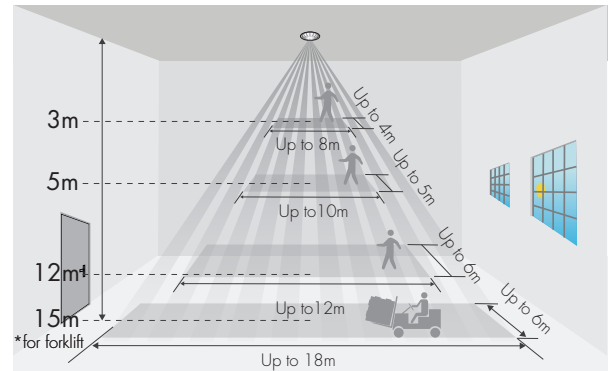

HIR63

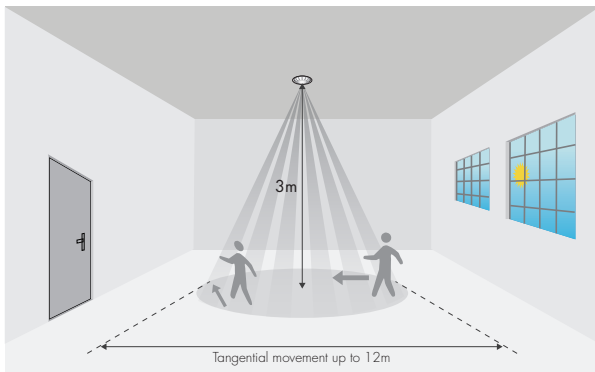

HIR63/R

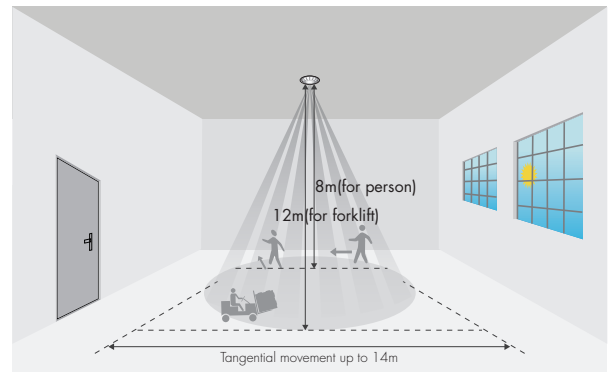

*The detection patterns are based upon 5km/h movement speed.

Dimming Interface Operation Notes

Switch-Dim

The provided Switch-Dim interface allows for a simple dimming method using commercially available non-latching (momentary) wall switches. Detailed Push switch configurations can be set on Koolmesh app.

Switch Function	Action	Descriptions
Push switch	Short press (<1 second) * Short press has to be longer than 0.1s, or it will be invalid.	- Turn on/off - Recall a scene - Turn on only - Exit manual mode - Turn off only - Do nothing
	Double push	- Turn on only - Exit manual mode - Turn off only - Do nothing - Recall a scene
	Long press (≥ 1 second)	- Dimming - Colour tuning - Do nothing
Simulate sensor	/	- Upgrade a normal on/off motion sensor to a Bluetooth controlled motion sensor

Additional Information / Documents

1. To learn more about detailed product features/functions, please kindly refer to
<https://hytronik.com/product/hc438v-bt>
2. Regarding precautions for Bluetooth product installation and operation, please kindly refer to
<https://hytronik.com/service/downloads> (Bluetooth Products Precautions for Product Installation and Operation)
3. Regarding precautions for Microwave sensor installation and operation, please kindly refer to:
<https://hytronik.com/service/downloads> (Microwave Sensors Precautions for Product Installation and Operation)
4. Regarding precautions for PIR sensors installation and operation, please kindly refer to:
<https://hytronik.com/service/downloads> (PIR Sensors Precautions for Product Installation and Operation)
5. Data sheet is subject to change without notice. Please always refer to the most recent release on
<https://hytronik.com/products/system-level-components>
6. Regarding Hytronik standard guarantee policy, please refer to
<https://hytronik.com/service/downloads> (Guarantee Conditions document)