

IP65 Dual Sense Sensor with Bluetooth® 5.0 SIG Mesh

HIM98 (High Bay)

HF & PIR, Tri-level control & Daylight harvest, 0/1-10V Dimmable

HYTRONIK®

Bluetooth® CE EMC RED CB IP65 DUAL

Product Description

HIM98 is a Bluetooth 0/1-10V high-bay Dual-sense™ (Microwave + PIR) motion sensor, with capability of up to 15m installation height. It is designed with robust IP65 structure, and offers 3 different installation methods and 3 different lens options. With Bluetooth wireless mesh networking, it makes communication much easier without any hardwiring, which eventually adds values to luminaires and saves costs for projects. Meanwhile, simple device setup and commissioning can be done via **Koolmesh®** app.





App Features

- Quick setup mode & advanced setup mode
- Tri-level control
- Daylight harvest
- Circadian rhythm (Human centric lighting)
- Floorplan feature to simplify project planning
- Web app/platform for dedicated project management
- Koolmesh Pro iPad version for on-site configuration
- Grouping luminaires via mesh network
- Scenes
- Detailed motion sensor settings
- Dusk/Dawn photocell (Twilight function)
- Schedule to run scenes based on time and date
- Astro timer (sunrise and sunset)
- Staircase function (primary & secondary)
- Internet-of-Things (IoT) featured
- Device firmware update over-the-air (OTA)
- Device social relations check
- Bulk commissioning (copy and paste settings)
- Dynamic daylight harvest auto-adaptation
- Power-on status (memory against power loss)
- Offline commissioning
- Different permission levels via authority management
- Network sharing via QR code or keycode
- Remote control via gateway support HBGW01
- Interoperability with Hytronik Bluetooth product portfolio
- Compatible with EnOcean BLE switches
- Continuous development in progress...

Hardware Features

- 0/1-10V dimming control method
- 4 work modes:
 - HF only
 - PIR only
 - HF + PIR
 - HF / PIR
- 3 installation methods
- 3 lens options
- IP65 design
- High-bay (up to 15m height)
- 5-year warranty

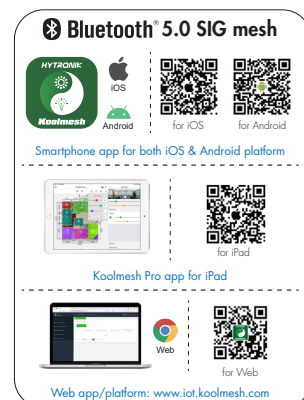

Technical Data

Input Characteristics	
Mains voltage	220-240VAC 50/60Hz
Stand-by power	<1.5W
Load ratings	800VA(capacitive) 1000W(resistive)
*Max withstandable in-rush current	120A@160μs
*0/1-10V	Sink Current ≤100mA Source Current ≤2mA
Warming-up	20s

*The Max withstandable in-rush current tested under 50% I_{peak} /230Vac

*The dimming port is capable of sinking up to 100mA current and sourcing up to 2mA current.

*Note: The number of drivers that can be connected depends on the output current of each driver's 0-10V or 1-10V interface. Ensure the total output current does not exceed the controller's load capacity.

Environment	
Operation temperature	Ta: -20°C ~ +50°C
IP rating	IP65




Sensor Data	
Sensor principle	High Frequency (microwave), PIR
Operation frequency	5.8GHz +/- 75MHz (HF)
Transmission power	<0.2mW (HF)
Sensor mode	4 modes: PIR, HF, PIR+HF, PIR/HF
Detection range	Max installation height: 1.5m (forklift)/12m (human) Max detection range: HF: Ø = 24m (forklift)/14m (human) PIR: Ø = 24m (forklift)/20m (human)
Detection angle	360°

Safety and EMC	
EMC standard (EMC)	EN55015, EN61000-3-2/-3-3
Safety standard (LVD)	EN60669-1, EN60669-2-1
Radio Equipment (RED)	EN300440, EN301489-1/-17/-3, EN62479, EN300328
Certification	UKCA, CE, EMC, RED, RCM




Mechanical Structures and Installations

For more details, please refer to user manual.




A. Ceiling mount (HIM98A)

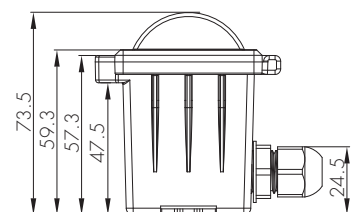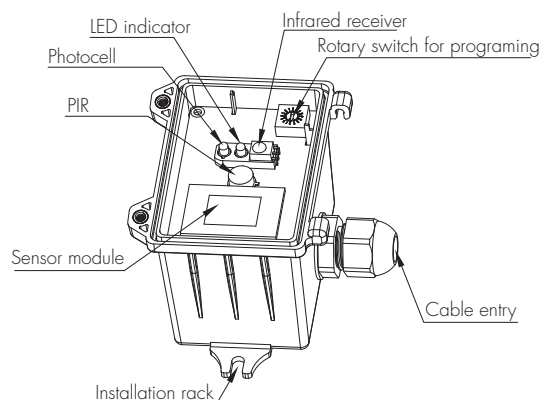

B. Screw to the Luminaire by conduit (HIM98B)

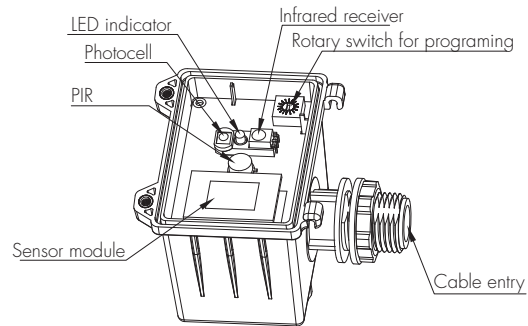


C. Attach to the shade by clamp (HIM98C)

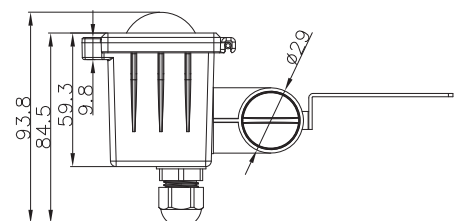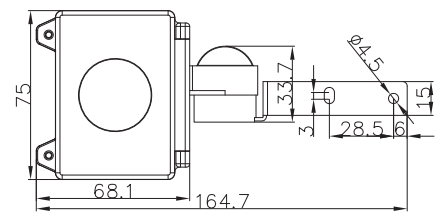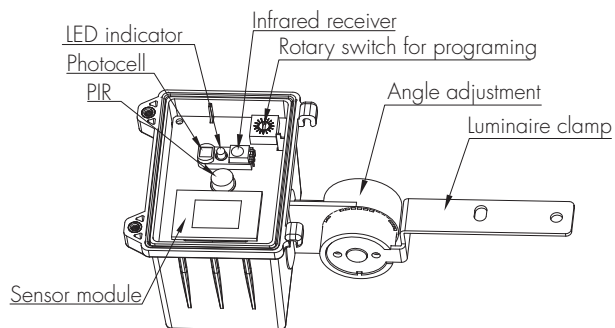

Note: We recommend the mounting distance between sensor to sensor should be more than 2m to prevent sensors from false-triggering.

Wiring Diagram

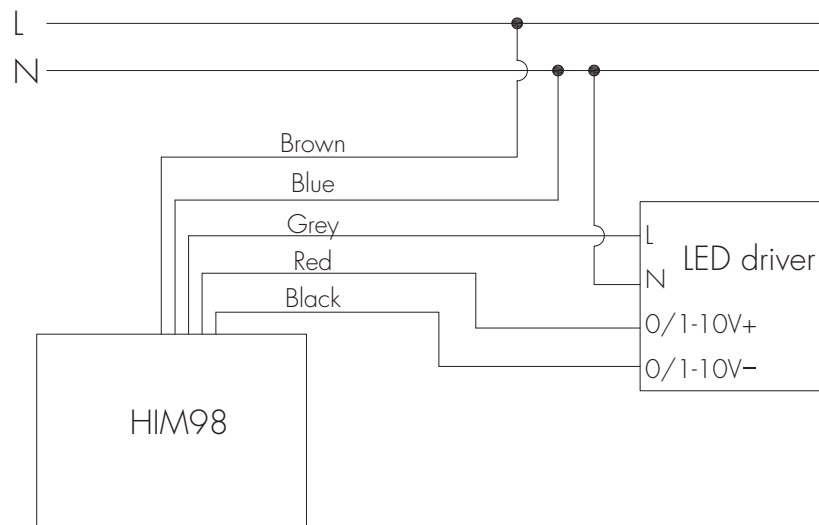

Dual Sense Introduction

It's commonly known Microwave and Infrared are main detecting technologies in lighting controls. Both have the advantage and disadvantage for industrial applications.

Advantage

- * sensitive to minor motion.
- * sensitive to radial movement.
- * can be reflected by objects hence covering big detection area
- * resilient to heat source, smoke and and air conditioner.



Disadvantage

- * penetrates walls, picks up motions outside of the office area;
- * back wave detection, false trigger by motions at the back.
- * can be false triggered by ventilation fans, water pipe, elevators etc. in industrial application.

Advantage

- * no penetration, confined detection area.
- * sensitive to tangential movement.
- * resilient to motion object which has no heat radiation.



Disadvantage

- * can be false triggered by air conditioner, smoke and other heat sources.


The remedy is to create Dual Sense by combining both technologies to make use of the advantage and bypass the disadvantage.

4 optional detection modes selectable:


- * HF: Microwave only
- * PIR: PIR mode only
- * HF+PIR: both PIR and microwave mode, to decrease the detection capability and detection area. Only when both detections are activated, the motion is considered valid. This is to prevent the sensor from false trigger by heat source, air conditioner, ventilation fans, water pipe and elevators etc...
- * HF/PIR: either PIR or microwave mode, to increase the detection capability and detection area;

Detection Pattern

End user can choose the suitable PIR lens in real application to fulfill various requirements. Three options are offered for selection:

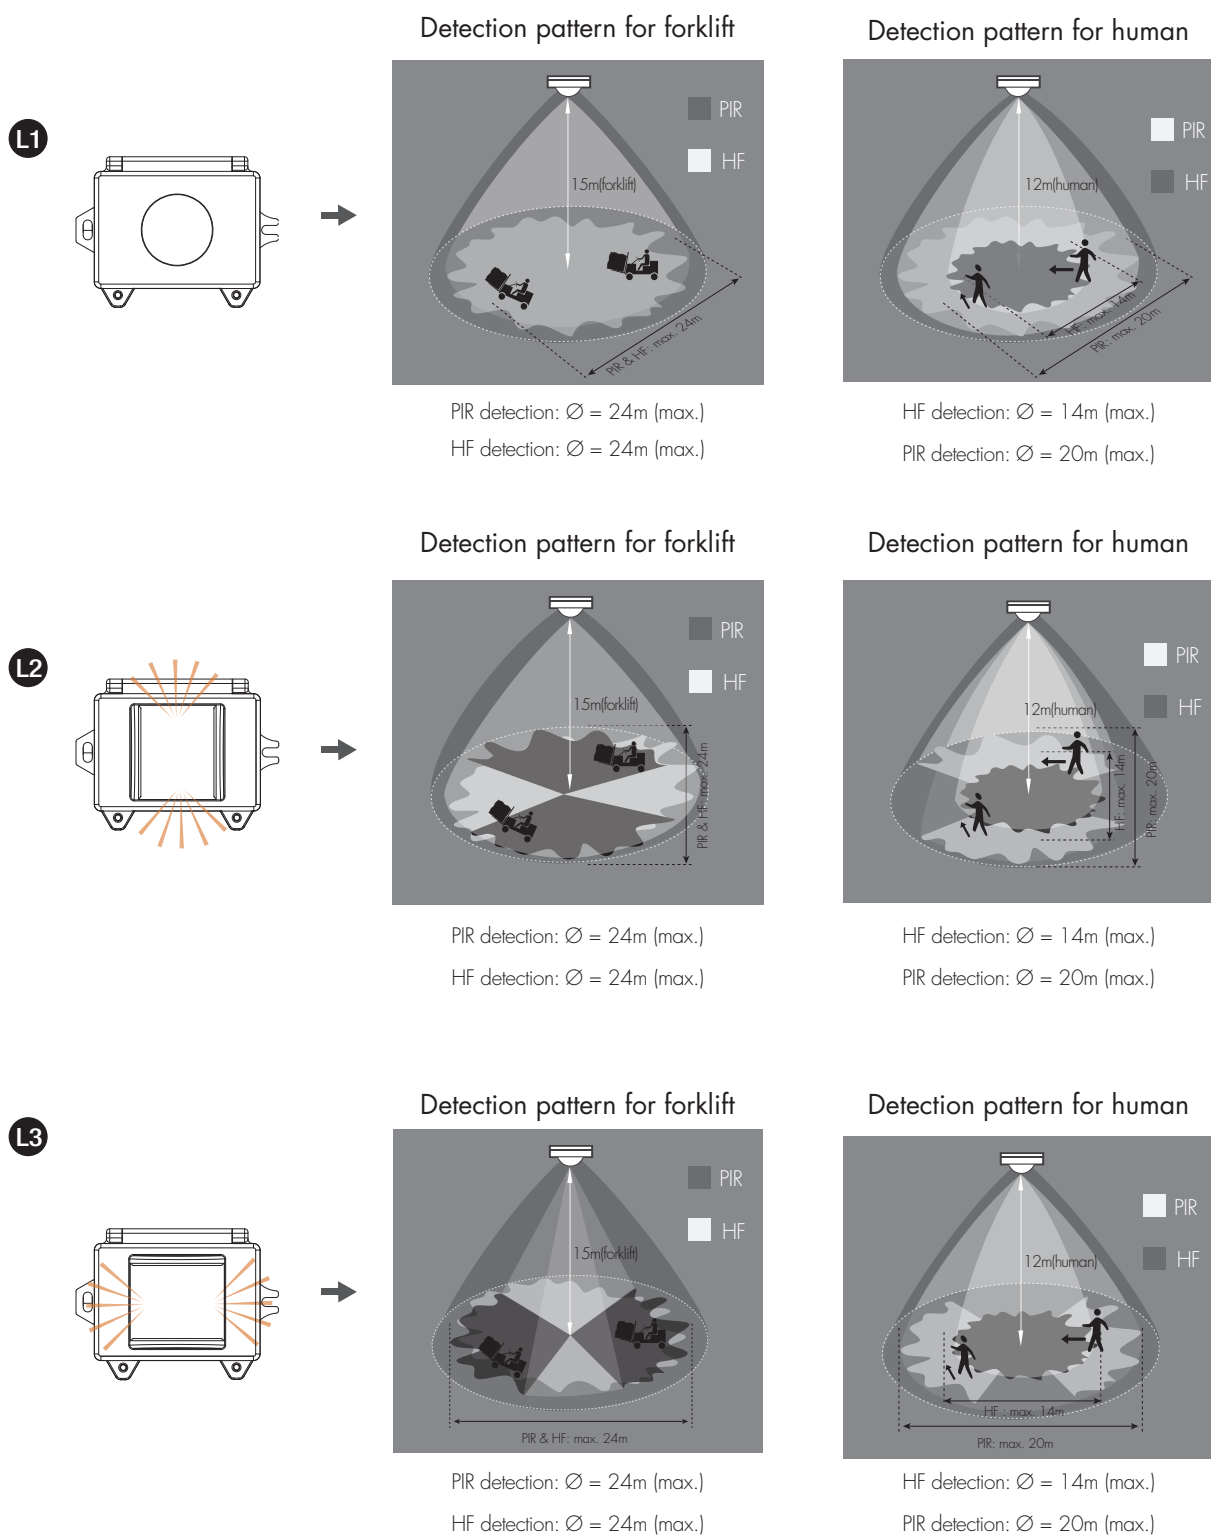

Smart Phone to Device Range

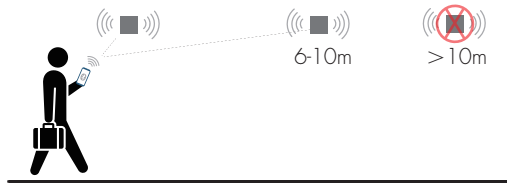

The smart device with the App installed will have a typical range of 10m, but varies from device to device. During commissioning, the installer will need to be in range of the devices when searching for devices to add to the network.

Once the devices have been added to the network via the App, the devices will start communicating within the wireless mesh. This means that once the network is complete, all devices are accessible from the smart device when in a 20m range of a single point.

Additional Information / Documents

1. To learn more about detailed product features/functions, please kindly refer to
<https://hytronik.com/product/him98>
2. Regarding precautions for Microwave sensor installation and operation, please kindly refer to
<https://hytronik.com/service/downloads> (Microwave Sensors Precautions for Product Installation and Operation)
3. Regarding precautions for PIR sensors installation and operation, please kindly refer to
<https://hytronik.com/service/downloads> (PIR Sensors Precautions for Product Installation and Operation)
4. Data sheet is subject to change without notice. Please always refer to the most recent release on
<https://hytronik.com/products/motion-daylight-sensors>
5. Regarding Hytronik standard guarantee policy, please kindly refer to
<https://hytronik.com/service/downloads> (Guarantee Conditions document)