

Detached Motion Sensor with  Bluetooth® 5.0 SIG Mesh

HC038V/BT
0/1-10V Output

HCD038/BT
DALI Output

HYTRONIK®



Product Description

HC038V/BT is a Bluetooth 0/1-10V control base whereas HCD038/BT is a Bluetooth DALI control base with 30mA DALI power supply built in. They work with a wide range of microwave and PIR sensor heads. They are ideal for plastic luminaires as compared to metal luminaires because Bluetooth signal can transmit through plastic. They are suitable for any typical indoor applications such as office, classroom, car park, warehouse and other commercial/industrial areas. With Bluetooth wireless mesh networking, it makes communication much easier without any hardwiring, which eventually adds values to luminaires and saves costs for projects. Meanwhile, simple device setup and commissioning can be done via **Koolmesh™** app.










HC038V/BT











HCD038/BT



App Features

-  Quick setup mode & advanced setup mode
-  Web app/platform for project deployment & data analysis
-  Koolmesh Pro app on iPad for on-site configuration
-  Floorplan feature to simplify project planning
-  One-key device replacement
-  Device social relations check
-  Staircase function (primary & secondary)
-  Remote control via gateway support HBGW01
-  Heat map
-  Dynamic daylight harvest auto-adaptation
-  Grouping luminaires via mesh network
-  Scenes
-  Dusk/Dawn photocell (Twilight function)
-  Tri-level control
-  Daylight harvest
-  Push switch configuration
-  Detailed motion sensor settings
-  Schedule
-  Astro timer (sunrise and sunset)
-  Power-on status (memory against power loss)
-  Offline commissioning
-  Bulk commissioning (copy and paste settings)
-  Different permission levels via authority management
-  Network sharing via QR code or keycode
-  Interoperability with Hytronik Bluetooth product portfolio

-  Compatible with EnOcean BLE switches
-  Internet-of-Things (IoT) featured
-  Device firmware update over-the-air (OTA)
-  Continuous development in progress...

Hardware Features

-  HC038V/BT: 0/1-10V output :
 - 400VA (capacitive)
 - 800W (resistive)
-  HCD038/BT: 30mA DALI broadcast output
-  Plug'n'Play for flexible installation and cost saving assemble
-  Support to control DT8 LED drivers (HCD038/BT)
-  2 Push inputs for flexible manual control(HCD038/BT)
-  Zero crossing detection circuit to reduce in-rush current and prolong relay lifetime (HC038V/BT)
-  Loop-in and loop-out terminals for efficient installation (HC038V/BT only)
-  5-year warranty

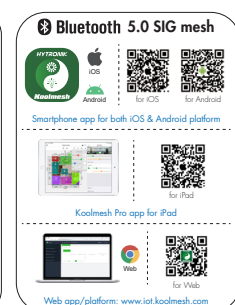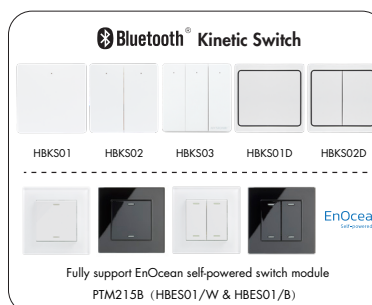



Technical Specifications (HC038V/BT HCD038/BT)

| Bluetooth Transceiver | |
|------------------------|---------------------------|
| Operation frequency | 2.4 GHz - 2.483 GHz |
| Transmission power | 4 dBm |
| Range (Typical indoor) | 10~30m |
| Protocol | Bluetooth® 5.0 SIG Mesh |
| Safety & EMC | |
| EMC standard (EMC) | EN55015, EN61000, EN61547 |
| Safety standard (LVD) | EN60669-1, EN60669-2-1 |
| RED | EN300328, EN301489-1/-17 |
| Certification | ENEC, CB, CE, RED, RCM |



| Input & Output Characteristics | |
|---|---|
| Operating voltage | 220~240VAC 50/60Hz |
| Stand-by power | <1W |
| Load ratings: HC038V/BT HCD038/BT | Capacitive: 400W; Resistive: 800W max.30mA |
| Warming-up | 20s |
| Environment | |
| Operation temperature | Ta: -20°C ~ +55°C |
| Case temperature (Max.) | Tc: +75°C |
| IP rating | IP20 |

Mechanical Structure & Dimensions


HC038V/BT (0/1-10V output)

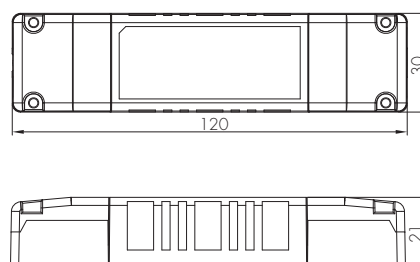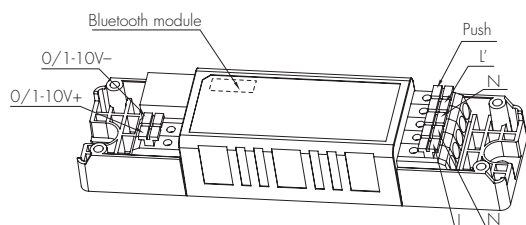

HCD038/BT (DALI output)

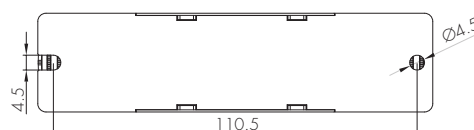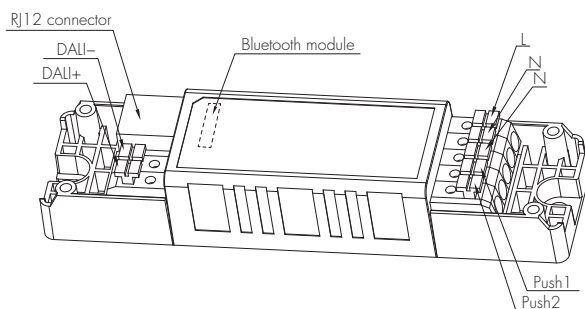

Wire Preparation




To make or release the wire from the terminal, use a screwdriver to push down the button.


1. 200 metres (total) max. for 1mm² CSA (Ta = 50°C)
2. 300 metres (total) max. for 1.5mm² CSA (Ta = 50°C)

Wiring Diagram

HC038V/BT

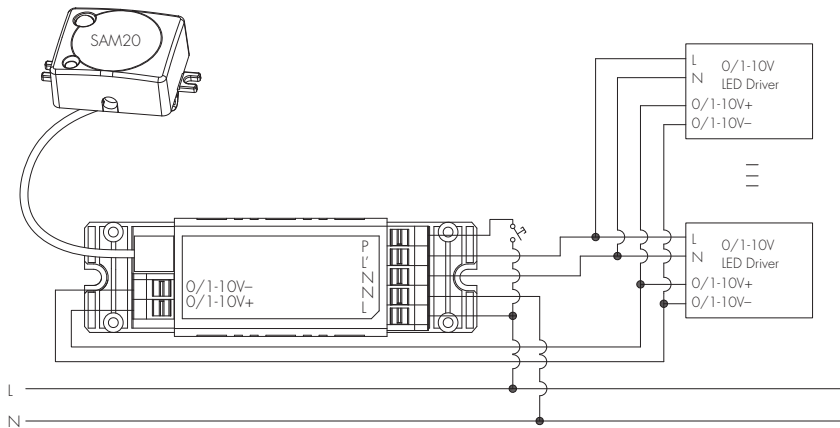

HCD038/BT

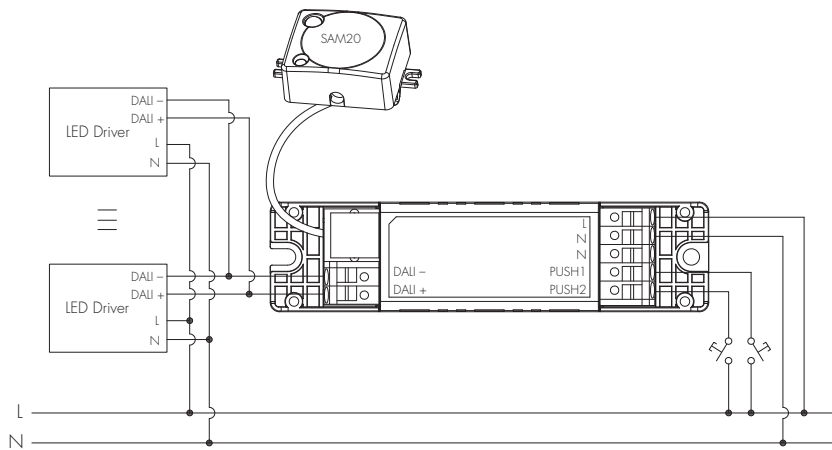

Technical Specifications for Sensor Heads

| PIR Sensor Properties | | |
|-----------------------|--------------------------------------|---|
| Sensor principle | PIR detection | |
| Operating voltage | 5VDC | |
| Detection range * | HIRO5 & HIRO5/FM HIRO5/AA & HIRO7 | Max installation height: 3m; Max detection range: 6m (diameter) |
| | HIR11 | Max installation height: 15m (forklift); 12m (single person); Max detection range: 24m (diameter) |
| | HIR12 | Max installation height: 15m (forklift); 12m (single person); Max detection range: 18m*6m (L*W) |
| | HIR63 | Max installation height: 3m; Max detection range: 12m (diameter) |
| | HIR63/R | Max installation height: 12m (forklift); 8m (single person); Max detection range: 14m (diameter) |

| HF Sensor Properties | | |
|----------------------|-----------------------------------|--|
| Sensor principle | High Frequency (microwave) | |
| Operating voltage | 5VDC | |
| Operation frequency | 5.8GHz +/- 75MHz | |
| Transmission power | <0.2mW | |
| Detection range * | SAM20 & SAM21 SAM22 & SAM22/AA | Max installation height: 3m; Max detection range: 12m (diameter) |
| | SAM23 | Max installation height: 15m (forklift); 12m (single person); Max detection range: 20m (diameter) |


* The detection range is heavily influenced by sensor placement (angle) and different walking paces. It may be reduced under certain conditions.

PIR & microwave sensor heads

The range of PIR and microwave sensor heads below offers powerful number of Plug'n'Play feature options to expand the flexibility of luminaire design. This approach to luminaire design reduces space requirements and component costs whilst simplifying production.


A. HIRO5

PIR sensor head
The cable length is around 30cm.

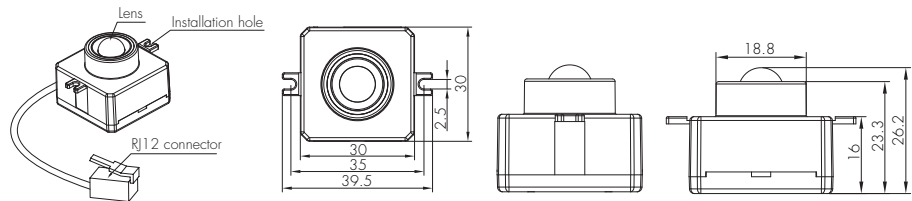


B. HIRO5/FM

PIR sensor head
The cable length is around 30cm.

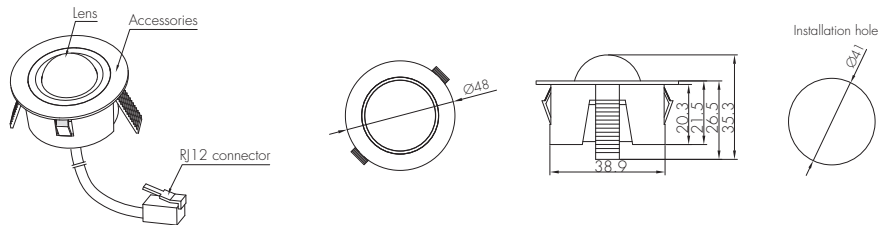


C. HIRO5/AA

PIR sensor head
Adjustable angle
The cable length is around 30cm.

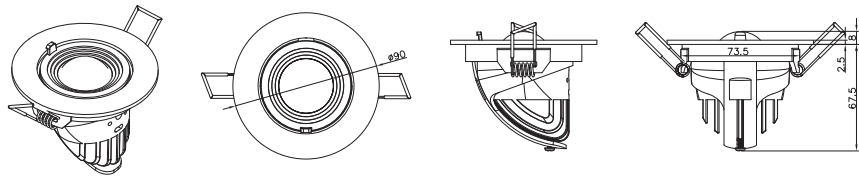


D. HIRO7

PIR sensor head
Photocell Advance™
The cable length is around 30cm.

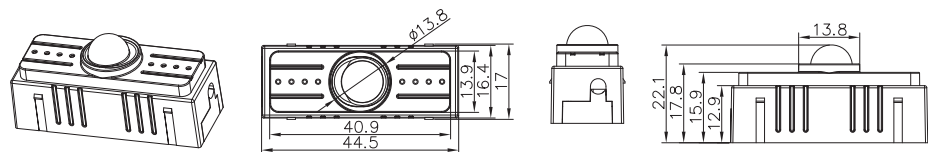


E. HIR11/S

PIR sensor head
Surface mounting
For highbay application
IP65 (facia / lens part)
The cable length is around 30cm.

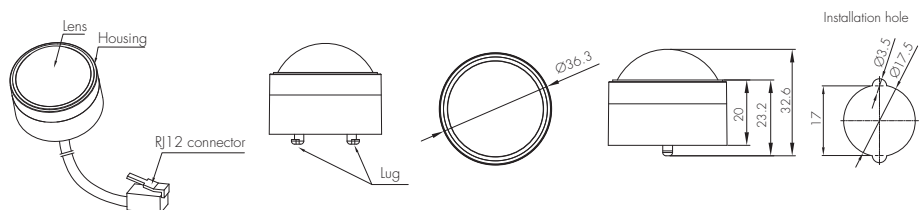


F. HIR11/F

PIR sensor head
 Flush mounting
 For highbay application
 IP65 (facia / lens part)
 The cable length is around 30cm.

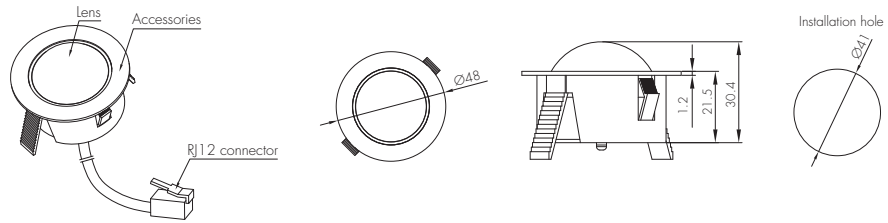


G. HIR11/C

PIR sensor head
 Screw to the luminaire by conduit
 For highbay application
 IP65 (facia / lens part)
 The cable length is around 30cm.

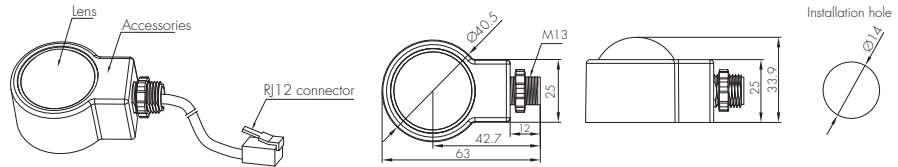

H. HIR12

PIR sensor head
 For highbay application
 IP65 (facia / lens part)
 The cable length is around 30cm.

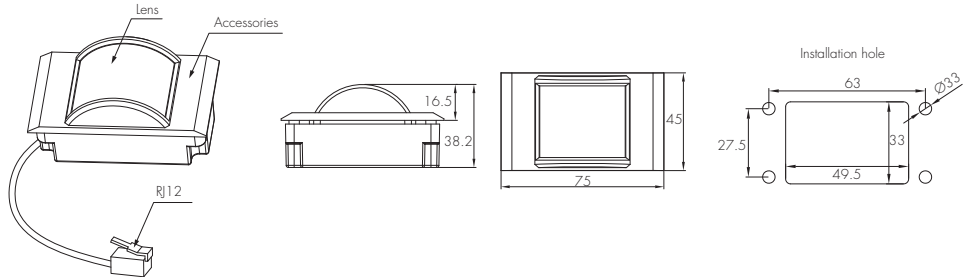


Installation for HIR12

We suggest that the metal plate thickness to be 0.8mm - 1.6mm to ensure perfect focal length for the PIR lens.


I. HIR63

PIR sensor head
 The cable length is around 30cm.

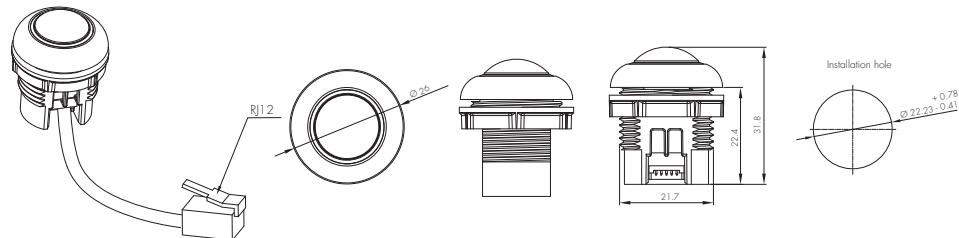


J. HIR63 with HA04

PIR sensor head
 Optional accessory
 The cable length is around 30cm.

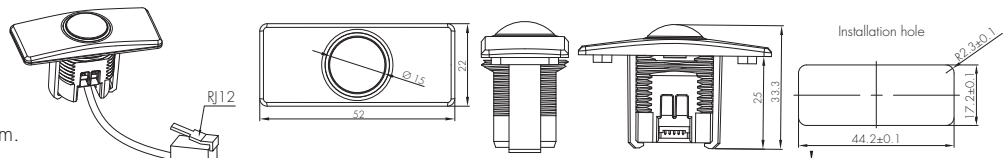


K. HIR63 with HA05

PIR sensor head
 Optional accessory
 The cable length is around 30cm.

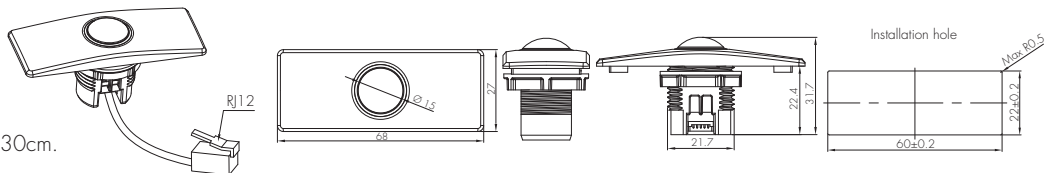


L. HIR63/R


PIR sensor head
 IP65 (facia / lens part)
 The cable length is around 30cm.

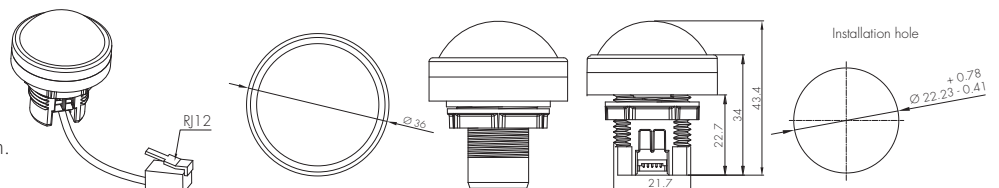


M. SAM20
 HF sensor head
 Photocell Advance™
 The cable length is around 30cm.

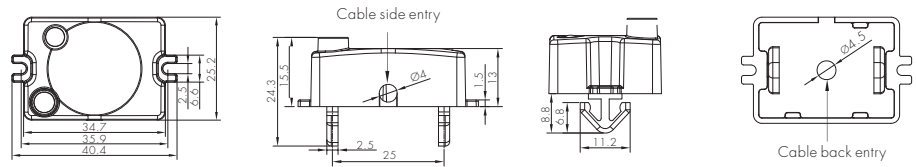


N. SAM21
 HF sensor head
 IP65
 The cable length is around 30cm.

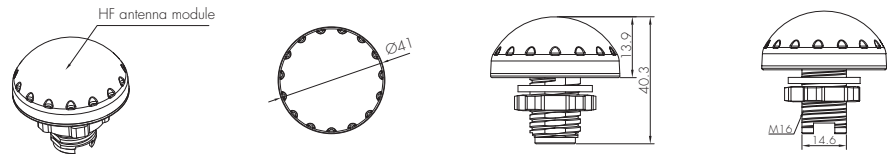


O. SAM22
 HF sensor head
 Flush mount
 The cable length is around 30cm.

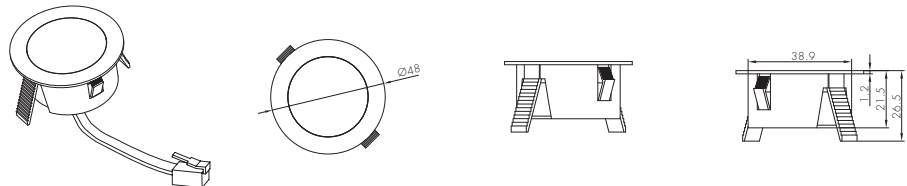

P. SAM22/AA
 HF sensor head
 Adjustable angle
 The cable length is around 30cm.




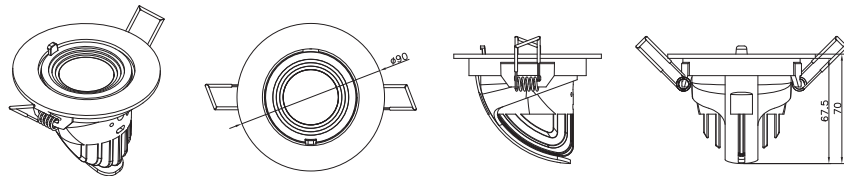


Q. SAM23
 HF sensor head
 Photocell advance™
 Daylight sensor
 For highbay application
 The cable length is around 30cm.

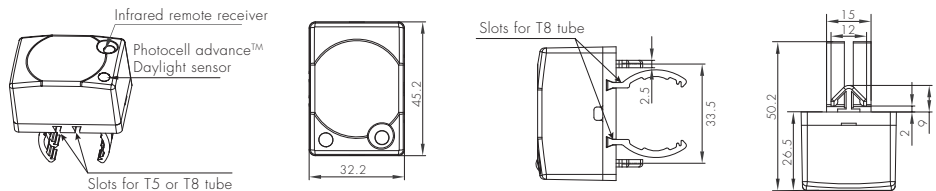

Optional Accessory: Reinforced Bluetooth Antenna

For some special applications, customers may need a larger Bluetooth transmission for both smartphone to device and device to device. Thanks to the reinforced Bluetooth antenna (optional black or white color to choose from), with it being added to the control base HC038V/BT & HCD038/BT, the transmission distance (smartphone to device) enlarges to 20m, the distance of device to device is around 50m.

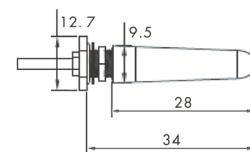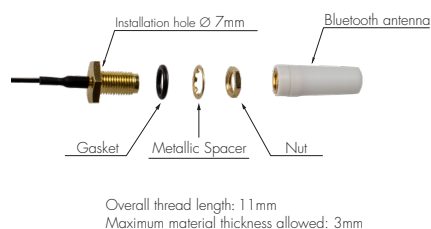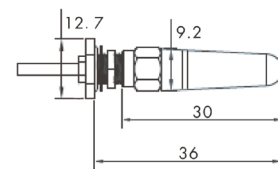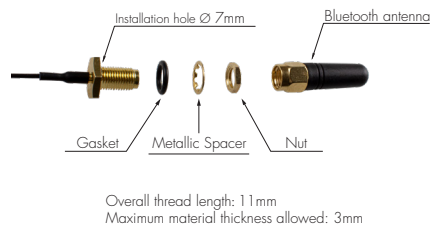

Installation Method



Solder the antenna to the Bluetooth module




Drill a 7mm hole in the fixture
Assemble the antenna parts in turn



Make sure the antenna head is outside the fixture


Detection Pattern

SAM23

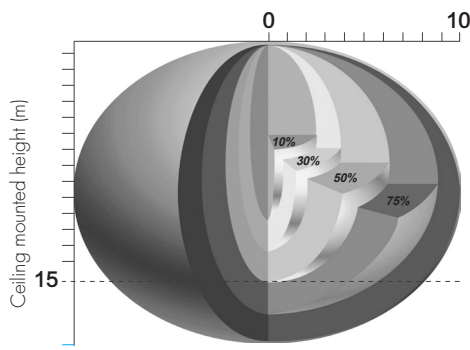

Ceiling mounted detection pattern (m)


SAM20 & SAM21 & SAM22

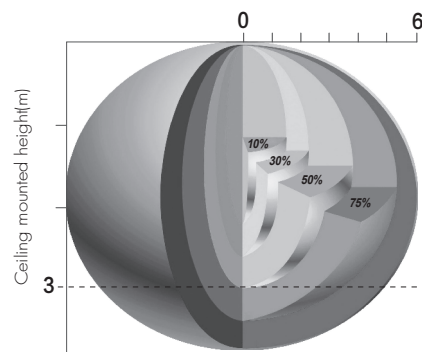


Ceiling mounted detection pattern (m)

Model SAM22/AA


Sensitivity set to maximum, Sensor head angle set to maximum

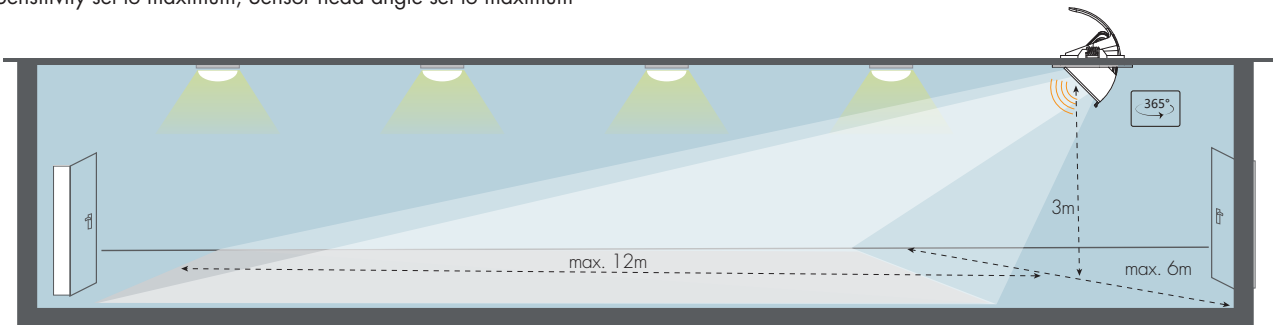


HIRO5 & HIRO5/FM & HIRO5/AA & HIRO7

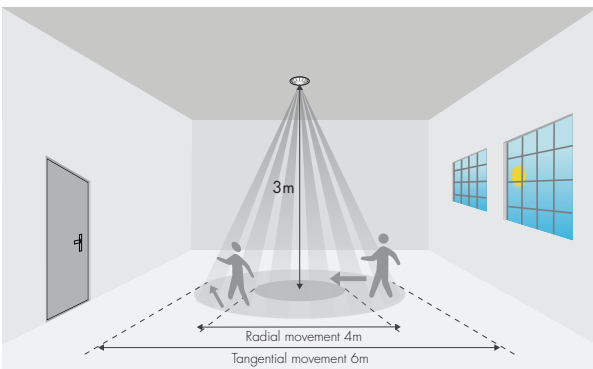


HIR12

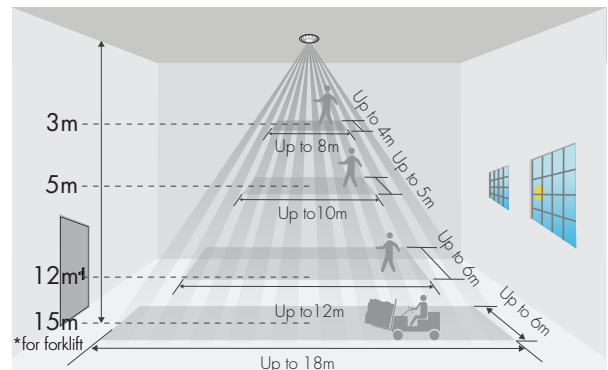

HIR63

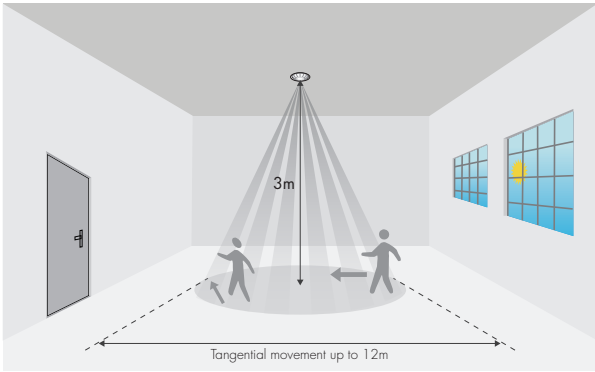

HIR63/R

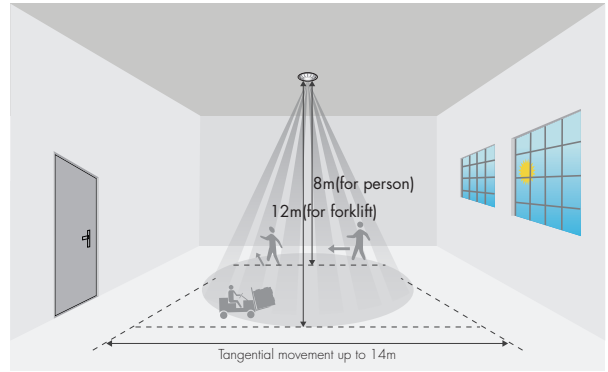


*The detection patterns are based upon 5km/h movement speed.

HIR 11 (High-bay)




HIR 11: High-bay lens detection pattern for forklift @ Ta = 20°C
 (Recommended installation height **10m-15m**)

A: Tangential movement

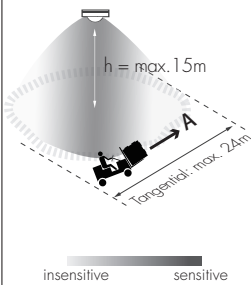

B: Radial movement

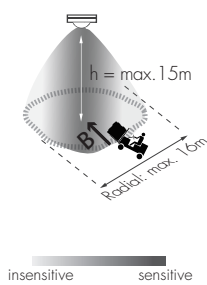


| Mount height | Tangential (A) | Radial (B) |
|--------------|---------------------------------|---------------------------------|
| 10m | max 380m ² (Ø = 22m) | max 201m ² (Ø = 16m) |
| 11m | max 452m ² (Ø = 24m) | max 201m ² (Ø = 16m) |
| 12m | max 452m ² (Ø = 24m) | max 201m ² (Ø = 16m) |
| 13m | max 452m ² (Ø = 24m) | max 177m ² (Ø = 15m) |
| 14m | max 452m ² (Ø = 24m) | max 133m ² (Ø = 13m) |
| 15m | max 452m ² (Ø = 24m) | max 113m ² (Ø = 12m) |




HIR 11: High-bay lens detection pattern for single person @ Ta = 20°C
 (Recommended installation height **2.5m-12m**)

A: Tangential movement

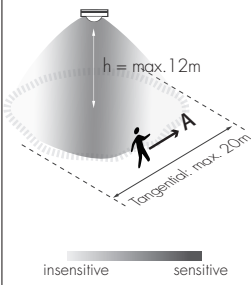

B: Radial movement

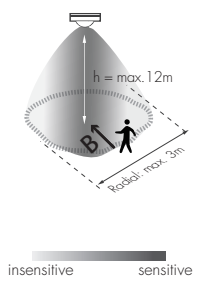

| Mount height | Tangential (A) | Radial (B) |
|--------------|-----------------------------------|------------------------------|
| 2.5m | max 50m ² (Ø = 8m) | max 7m ² (Ø = 3m) |
| 6m | max 104m ² (Ø = 11.5m) | max 7m ² (Ø = 3m) |
| 8m | max 154m ² (Ø = 14m) | max 7m ² (Ø = 3m) |
| 10m | max 227m ² (Ø = 17m) | max 7m ² (Ø = 3m) |
| 11m | max 269m ² (Ø = 18.5m) | max 7m ² (Ø = 3m) |
| 12m | max 314m ² (Ø = 20m) | max 7m ² (Ø = 3m) |

Dimming Interface Operation Notes

Switch-Dim

The provided Switch-Dim interface allows for a simple dimming method using commercially available non-latching (momentary) wall switches. Detailed Push switch configurations can be set on Koolmesh app.

| Switch Function | Action | Descriptions |
|------------------------------|---|---|
| Push switch | Short press (<1 second) * Short press has to be longer than 0.1s, or it will be invalid. | - Turn on/off - Turn on only - Turn off only - Recall a scene - Quit manual mode - Do nothing |
| | Double push | - Turn on only - Turn off only - Recall a scene - Quit manual mode - Do nothing |
| | Long press (≥1 second) | - Dimming - Colour tuning - Do nothing |
| Sensor-link | / | - Upgrade a normal on/off motion sensor to a Bluetooth controlled motion sensor |
| Emergency Self-Test Function | Short press (<1 second) * Short press has to be longer than 0.1s, or it will be invalid. | - Start Self test (Monthly) - Stop Self test - Start Self test (Annually) - Invalid |
| | Long press (≥1 second) | - Start Self test (Monthly) - Stop Self test - Start Self test (Annually) - Invalid |
| Fire Alarm (VFC signal only) | Refer to Koolmesh™ App User Manual V2.1 | - Able to connect the Fire Alarm system - Once the fire alarm system is triggered, all the luminaries controlled by the Push Switch will enter the preset scene (normally it's full on), after the fire alarm system gives the ending signal, all the luminaries controlled by this Push Switch will revert back to normal status. |

Additional Information / Documents

1. For full explanation of Hytronik Photocell Advance™ technology, please kindly refer to [www.hytronik.com/download ->knowledge ->Introduction of Photocell Advance](http://www.hytronik.com/download->knowledge->Introduction%20of%20Photocell%20Advance)
2. To learn more about detailed product features/functions, please refer to [www.hytronik.com/download ->knowledge ->Introduction of App Scenes and Product Functions](http://www.hytronik.com/download->knowledge->Introduction%20of%20App%20Scenes%20and%20Product%20Functions)
3. Regarding precautions for Bluetooth product installation and operation, please kindly refer to [www.hytronik.com/download ->knowledge ->Bluetooth Products - Precautions for Product Installation and Operation](http://www.hytronik.com/download->knowledge->Bluetooth%20Products%20-%20Precautions%20for%20Product%20Installation%20and%20Operation)
4. Regarding precautions for microwave sensor installation and operation, please kindly refer to [www.hytronik.com/download ->knowledge ->Microwave Sensors - Precautions for Product Installation and Operation](http://www.hytronik.com/download->knowledge->Microwave%20Sensors%20-%20Precautions%20for%20Product%20Installation%20and%20Operation)
5. Regarding precautions for PIR Sensors installation and operation, please kindly refer to [www.hytronik.com/download ->knowledge ->PIR Sensors - Precautions for Product Installation and Operation](http://www.hytronik.com/download->knowledge->PIR%20Sensors%20-%20Precautions%20for%20Product%20Installation%20and%20Operation)
6. Data sheet is subject to change without notice. Please always refer to the most recent release on [www.hytronik.com/products/bluetooth technology ->Bluetooth Sensors](http://www.hytronik.com/products/bluetooth%20technology->Bluetooth%20Sensors)
7. Regarding Hytronik standard guarantee policy, please refer to [www.hytronik.com/download ->knowledge ->Hytronik Standard Guarantee Policy](http://www.hytronik.com/download->knowledge->Hytronik%20Standard%20Guarantee%20Policy)