

Product Description

HIR60/NLC & HIR60/R/NLC are Bluetooth 5.0 SIG mesh PIR motion sensors, designed with Zhaga Book 20 connection that enables lighting designers/manufacturers to freely connect to Zhaga Book 20 LED Drivers via plug'n'play. It's embedded with Bluetooth module, PIR sensor and also a daylight sensor, and yet comes with a surprisingly super-mini size! Meanwhile, all commissioning and settings can be done via SILVAIR app.



HIR60/NLC



HIR60/R/NLC

Functions and Features

- Bluetooth® mesh compliant
- 4-in-1: Bluetooth + Zhaga + PIR motion sensor + Daylight sensor
- Optional accessories for different mounting style
- Super compact mini size
- Plug'n'Play via Zhaga Book 20 connection
- Daylight harvesting

(Note: The component may not be suitable for daylight harvesting usage due to not being precise in lux measurements. Please only use daylight harvesting feature if user conducted field tests and accepts the tolerance level.)

- Scene control, Task tuning (0 -100%)
- Compact form factor
- Autonomous sensor-based control
- OTA firmware upgrade
- Continuous dimming
- Individual/group addressing
- Decentralized control (no single point of failure)
- User-friendly design for installation
- IP65 rated design for HIR60/R/NLC
- 5-years warranty



The access to Silvaire apps

mobile app: Silvaire on the App Store

web app: platform.silvaire.com

Technical Specifications


Bluetooth Transceiver	
Operation frequency	2.4 GHz - 2.483 GHz
Transmission power	4 dBm
Range (Typical indoor)	10~30m
Protocol	 Bluetooth® Mesh

Environment	
Operation temperature	Ta: -20°C ~ 50°C
Storage temperature	-40°C ~ +70°C
Relative humidity	10 ~ 90%
IP rating	IP20


PIR Sensor Properties (HIR60/NLC & HIR60/R/NLC)	
Sensor principle	PIR detection
Operation voltage	9.5~22.5VDC
Input current	Approx. 30mA
Detection range *	HIR60/NLC Max installation height: 3m Max detection range (Ø): 12m HIR60/R/NLC Max installation height: 8m (for person) Max installation height: 12m (for forklift) Max detection range (Ø): 20m
Detection angle	360°

* The detection range is heavily influenced by sensor placement (angle) and different walking paces. It may be reduced under certain conditions.

Optional Accessories

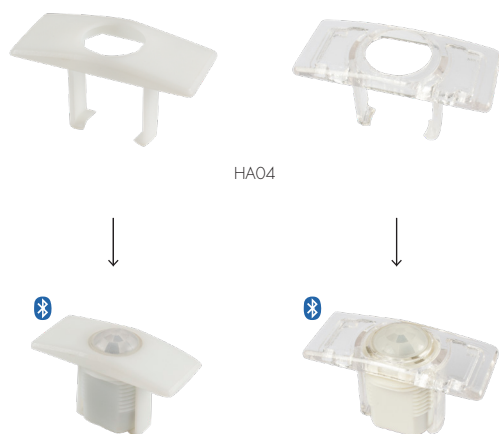

Demonstration of installation

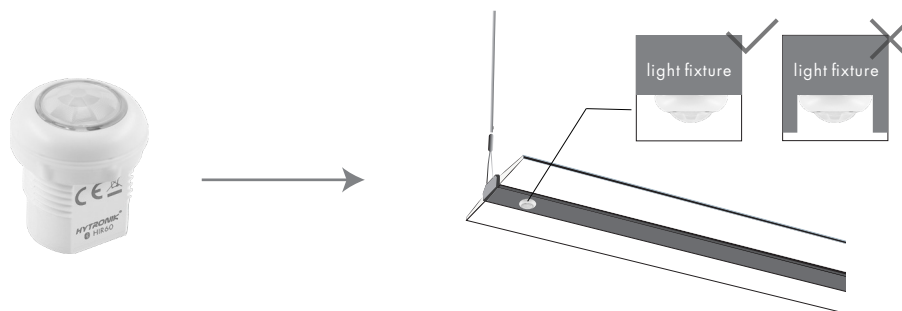


Installation Note:


1. To ensure better Bluetooth transmission, keep the sensor lens part beyond the surface of the light fixture.
2. After installed, please put the terminal seat back to the LED light source to avoid direct irradiation and ensure the accuracy of the daylight sensor.

Mechanical Structure & Dimensions


HIR60/NLC

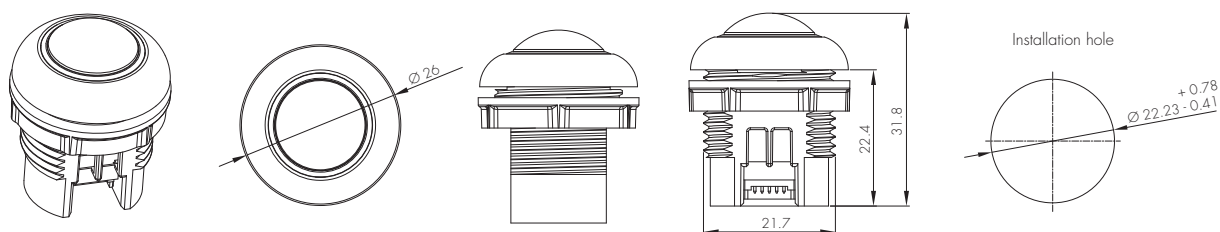


HIR60/NLC with HA04

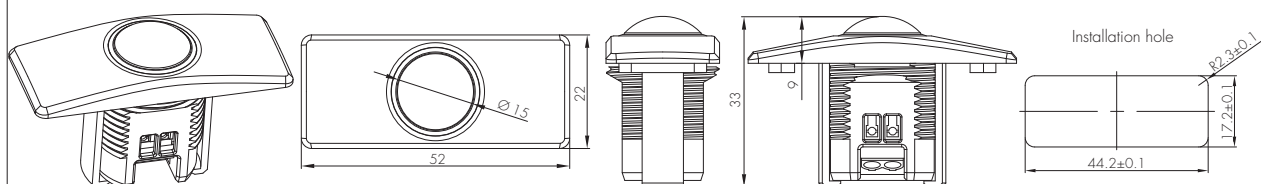


HIR60/NLC with HA05

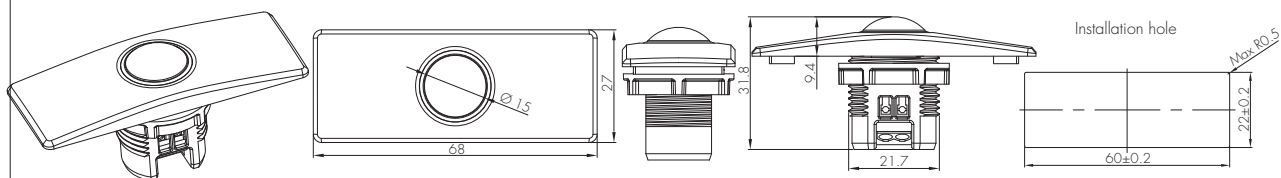

HIR60/R/NLC (IP65)

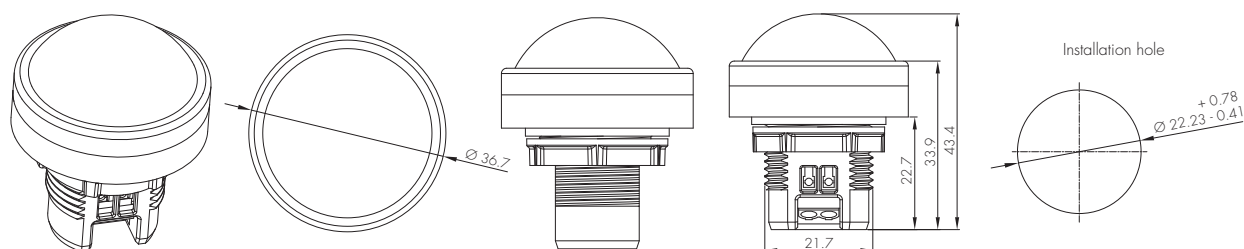

Wire Preparation




To make or release the wire from the terminal,
use a screwdriver to push down the button.

1.100 metres (total) max. for 0.5mm² CSA (Ta = 50°C)
2.150 metres (total) max. for 0.75mm² CSA (Ta = 50°C)

Wiring Diagram

DALI Driver

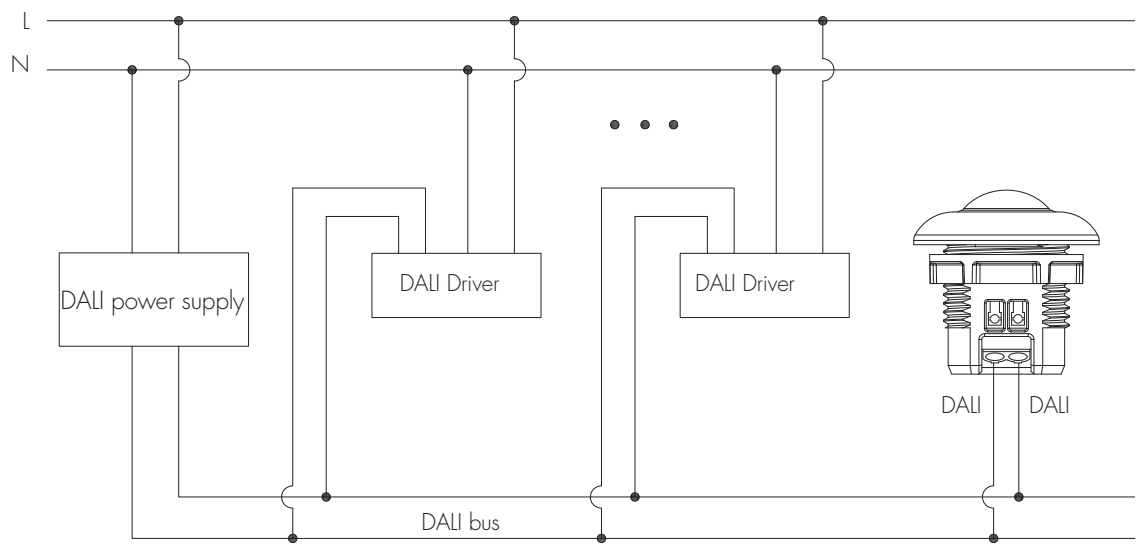


Detection Pattern - - Diagram 1

The data below is tested under following conditions:

- Single person walking;
- Sensor not connected to any driver that may have soft-on period;
- Testing temperature $T_a = 20^{\circ}\text{C}$;
- The testing is conducted in an open and spacious indoor field, without noticeable obstacles or influences that may affect PIR performances.



HIR60/NLC



Mount height	Tangential Movement
3m	max 113m ² (Ø = 12m)


Detection Pattern -- Diagram 2

The data below is tested under following conditions:

- Forklift driving;
- Sensor not connected to any driver that may have soft-on period;
- Testing temperature $T_a = 20^\circ\text{C}$;
- The testing is conducted in an open and spacious indoor field, without noticeable obstacles or influences that may affect PIR performances.



HIR60/NLC



Mount height	Tangential Movement
8m	max 201m ² (Ø = 16m)
9m	max 227m ² (Ø = 17m)
10m	max 254m ² (Ø = 18m)
11m	max 314m ² (Ø = 20m)
12m	max 314m ² (Ø = 20m)


Detection Pattern -- Diagram 3

The data below is tested under following conditions:

- Single person walking;
- Sensor not connected to any driver that may have soft-on period;
- Testing temperature $T_a = 20^\circ\text{C}$;
- The testing is conducted in an open and spacious indoor field, without noticeable obstacles or influences that may affect PIR performances.



HIR60/R/NLC



Mount height	Tangential Movement
3m	max 38m ² (Ø = 7m)
4m	max 50m ² (Ø = 8m)
5m	max 50m ² (Ø = 8m)
6m	max 64m ² (Ø = 9m)
7m	max 95m ² (Ø = 11m)
8m	max 113m ² (Ø = 12m)

Smart Phone to Device Range



The smart device with the App installed will have a typical range of 10m, but varies from device to device. During commissioning, the installer will need to be in range of the devices when searching for devices to add to the network.

Once the devices have been added to the network via the App, the devices will start communicating within the wireless mesh. This means that once the network is complete, all devices are accessible from the smart device when in a 20m range of a single point.

Additional Information / Documents

1. To learn more about detailed product features/functions, please kindly refer to <https://hytronik.com/product/hir60-nlc>
2. Regarding precautions for Bluetooth product installation and operation, please kindly refer to <https://hytronik.com/service/downloads> (Bluetooth Products Precautions for Product Installation and Operation)
3. Regarding precautions for PIR Sensors installation and operation, please kindly refer to <https://hytronik.com/service/downloads> (PIR Sensors Precautions for Product Installation and Operation)
4. Data sheet is subject to change without notice. Please always refer to the most recent release on <https://hytronik.com/products/motion-daylight-sensors>
5. Regarding Hytronik standard guarantee policy, please kindly refer to <https://hytronik.com/service/downloads> (Guarantee Conditions document)