

Detached Motion Sensor with  Bluetooth® 5.0 SIG Mesh

HC038V/BT **HCD038/BT**
0/1-10V Output DALI Output

HYTRONIK®



Product Description

HC038V/BT is a Bluetooth 0/1-10V control base whereas HCD038/BT is a Bluetooth DALI control base with 80mA DALI power supply built in. They work with a wide range of microwave and PIR sensor heads. They are ideal for plastic luminaires as compared to metal luminaires because Bluetooth signal can transmit through plastic. They are suitable for any typical indoor applications such as office, classroom, car park, warehouse and other commercial/industrial areas. With Bluetooth wireless mesh networking, it makes communication much easier without any hardwiring, which eventually adds values to luminaires and saves costs for projects. Meanwhile, simple device setup and commissioning can be done via **Koolmesh**® app.




App Features

-  Quick setup mode & advanced setup mode
-  Web app/platform for project deployment & data analysis
-  Koolmesh Pro app on iPad for on-site configuration
-  Floorplan feature to simplify project planning
-  One-key device replacement
-  Device social relations check
-  Staircase function (primary & secondary)
-  Remote control via gateway support HBGW01
-  Heat map
-  Dynamic daylight harvest auto-adaptation
-  Grouping luminaires via mesh network
-  Scenes
-  Dusk/Dawn photocell (Twilight function)
-  Tri-level control
-  Daylight harvest
-  Push switch configuration
-  Detailed motion sensor settings
-  Schedule
-  Astro timer (sunrise and sunset)
-  Power-on status (memory against power loss)
-  Offline commissioning
-  Bulk commissioning (copy and paste settings)
-  Different permission levels via authority management
-  Network sharing via QR code or keycode
-  Interoperability with Hytronik Bluetooth product portfolio
-  Compatible with EnOcean BLE switches
-  Internet-of-Things (IoT) featured

-  Device firmware update over-the-air (OTA)
-  Continuous development in progress...

Hardware Features

-  HC038V/BT: 0/1-10V output :
 - 400VA (capacitive)
 - 800W (resistive)
-  HCD038/BT: 80mA DALI broadcast output
-  Plug'n'Play for flexible installation and cost saving assemble
-  Support to control DT8 LED drivers (HCD038/BT)
-  Support D4i driver and collect energy, fault & diagnostics data (HCD038/BT)
-  2 Push inputs for flexible manual control(HCD038/BT)
-  Zero crossing detection circuit to reduce in-rush current and prolong relay lifetime (HC038V/BT)
-  Loop-in and loop-out terminals for efficient installation (HC038V/BT only)
-  5-year warranty

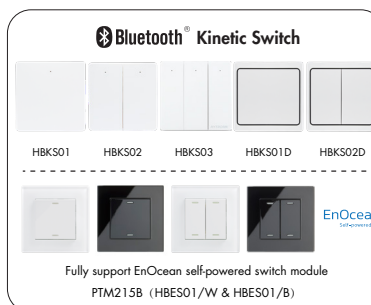

Technical Specifications (HC038V/BT HCD038/BT)




Bluetooth Transceiver	
Operation frequency	2.4 GHz - 2.483 GHz
Transmission power	4 dBm
Range (Typical indoor)	10~30m
Protocol	Bluetooth® 5.0 SIG Mesh
Safety & EMC	
EMC standard (EMC)	EN55015, EN61000, EN61547
Safety standard (LVD)	EN60669-1, EN60669-2-1
RED	EN300328, EN301489-1/-17
Certification	ENEC, CB, CE , RED, RCM

Input & Output Characteristics	
Operating voltage	220~240VAC 50/60Hz
Stand-by power	<1W
Load ratings: HC038V/BT	Capacitive: 400W; Resistive: 800W
DALI bus power supply: HCD038/BT	I max: 80mA U rated: 15VDC I guranteed: 64mA
Warming-up	20s



Environment	
Operation temperature	Ta: -20°C ~ +55°C
Case temperature (Max.)	Tc: +75°C
IP rating	IP20

Mechanical Structure & Dimensions



HC038V/BT (0/1-10V output)

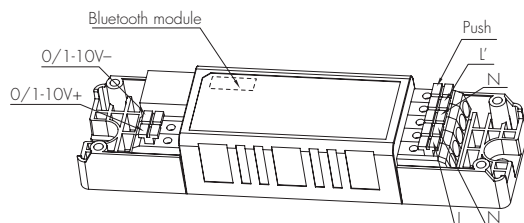

HCD038/BT (DALI output)

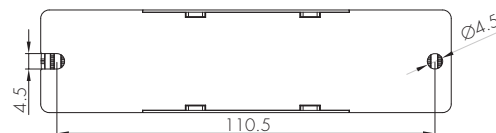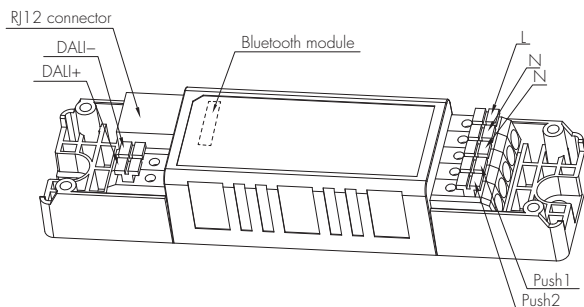

Wire Preparation




To make or release the wire from the terminal, use a screwdriver to push down the button.


1. 200 metres (total) max. for 1mm² CSA (Ta = 50°C)
2. 300 metres (total) max. for 1.5mm² CSA (Ta = 50°C)

Wiring Diagram

HC038V/BT

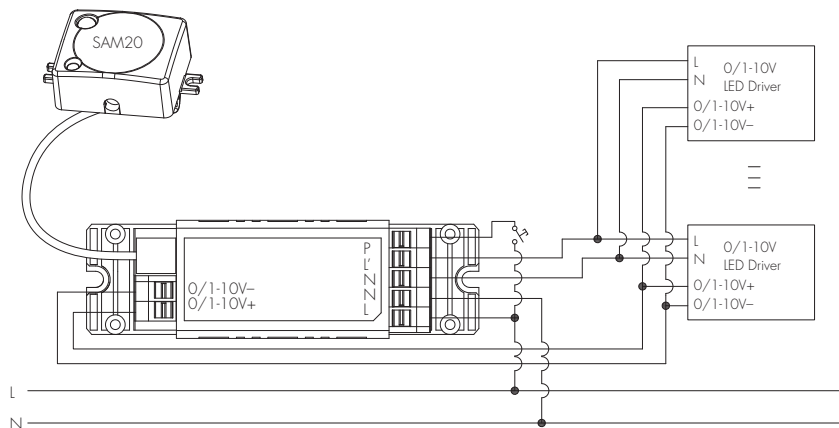

HCD038/BT

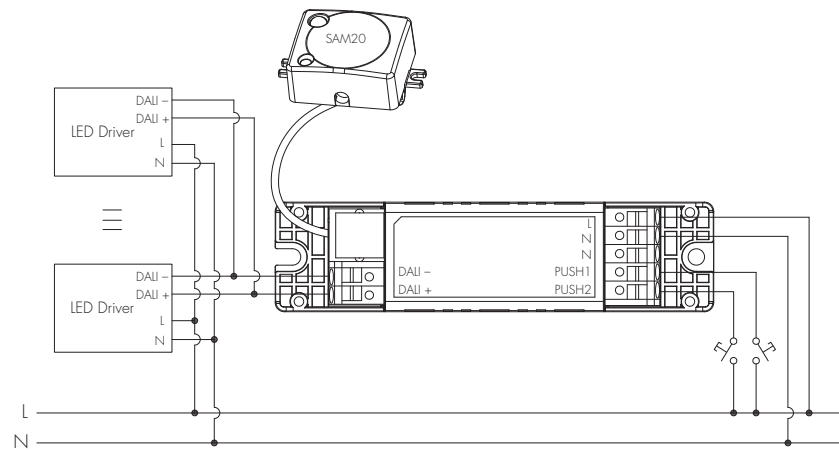

Technical Specifications for Sensor Heads

PIR Sensor Properties		
Sensor principle	PIR detection	
Operating voltage	5VDC	
Detection range *	HIRO5 & HIRO5/FM HIRO5/AA & HIRO7	Max installation height: 3m; Max detection range: 6m (diameter)
	HIR11	Max installation height: 15m (forklift); 12m (single person); Max detection range: 24m (diameter)
	HIR12	Max installation height: 15m (forklift); 12m (single person); Max detection range: 18m*6m (L*W)
	HIR63	Max installation height: 3m; Max detection range: 12m (diameter)
	HIR63/R	Max installation height: 12m (forklift); 8m (single person); Max detection range: 14m (diameter)

HF Sensor Properties		
Sensor principle	High Frequency (microwave)	
Operating voltage	5VDC	
Operation frequency	5.8GHz +/- 75MHz	
Transmission power	<0.2mW	
Detection range *	SAM20 & SAM21 SAM22 & SAM22/AA	Max installation height: 3m; Max detection range: 12m (diameter)
	SAM23	Max installation height: 15m (forklift); 12m (single person); Max detection range: 20m (diameter)


* The detection range is heavily influenced by sensor placement (angle) and different walking paces.
It may be reduced under certain conditions.

PIR & microwave sensor heads

The range of PIR and microwave sensor heads below offers powerful number of Plug'n'Play feature options to expand the flexibility of luminaire design. This approach to luminaire design reduces space requirements and component costs whilst simplifying production.


A. HIRO5

PIR sensor head
The cable length is around 30cm.

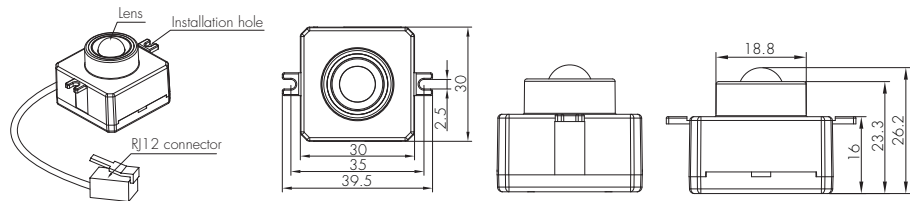


B. HIRO5/FM

PIR sensor head
The cable length is around 30cm.

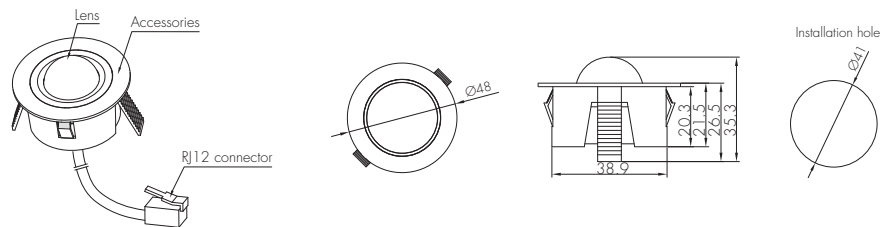


C. HIRO7

PIR sensor head
Photocell Advance™
The cable length is around 30cm.

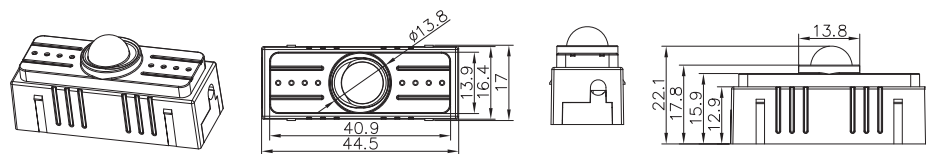


D. HIR11/S

PIR sensor head
Surface mounting
For highbay application
IP65 (facia / lens part)
The cable length is around 30cm.

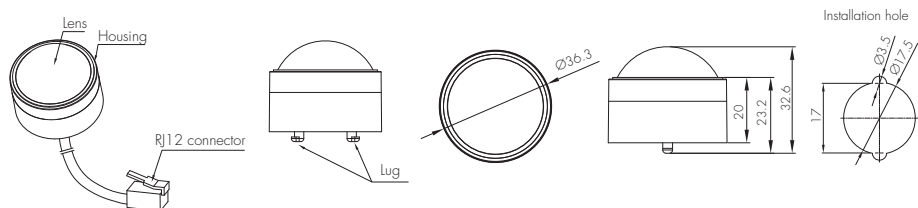

E. HIR11/F

PIR sensor head
Flush mounting
For highbay application
IP65 (facia / lens part)
The cable length is around 30cm.

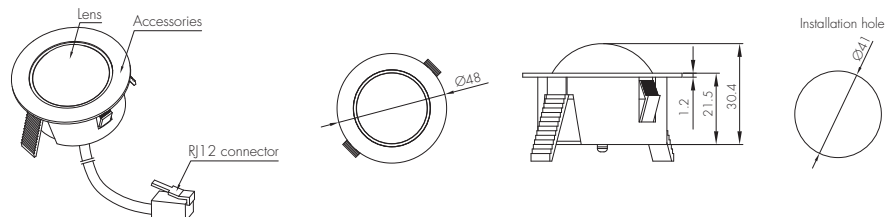

F. HIR11/C


PIR sensor head

Screw to the luminaire by conduit

For highbay application

IP65 (facia / lens part)

The cable length is around 30cm.

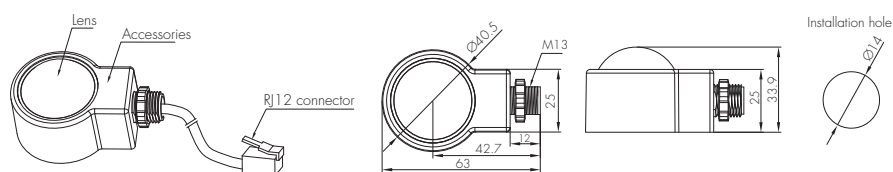


G. HIR12

PIR sensor head

For highbay application

IP65 (facia / lens part)

The cable length is around 30cm.

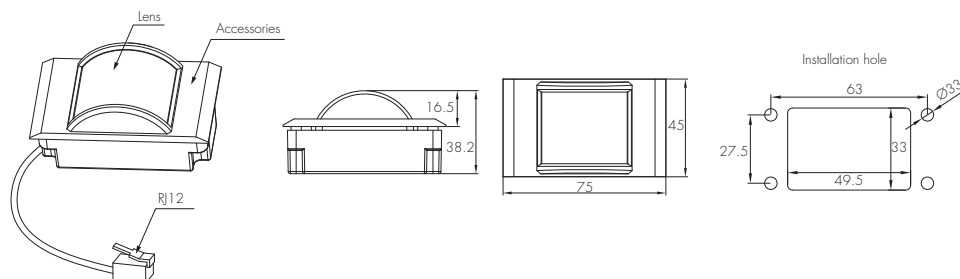

Installation for HIR12




We suggest that the metal plate thickness to be 0.8mm - 1.6mm to ensure perfect focal length for the PIR lens.

H. HIR63

PIR sensor head

The cable length is around 30cm.

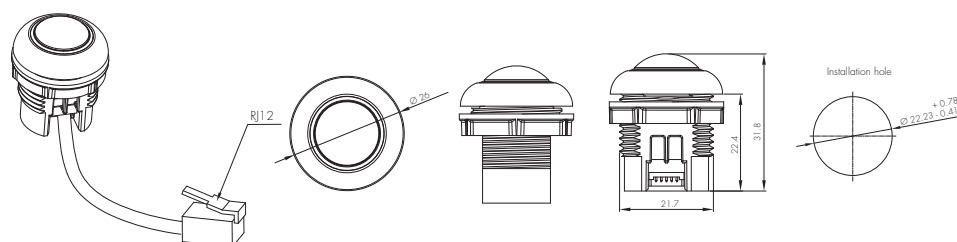


I. HIR63 with HA04

PIR sensor head

Optional accessory

The cable length is around 30cm.

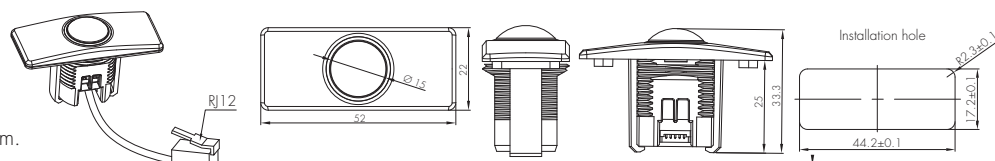


J. HIR63 with HA05

PIR sensor head

Optional accessory

The cable length is around 30cm.

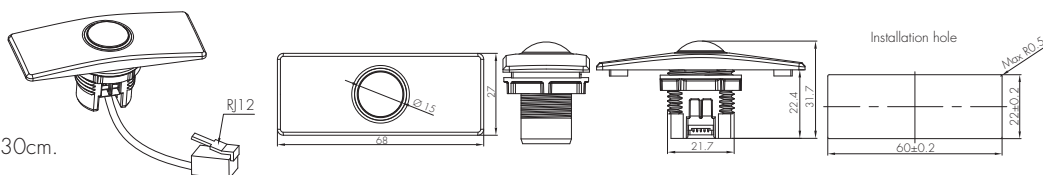


K. HIR63/R

PIR sensor head

IP65 (facia / lens part)

The cable length is around 30cm.

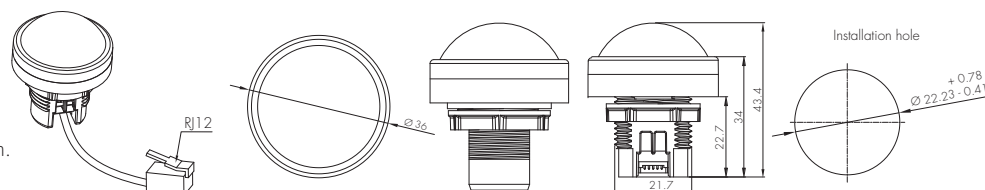


L. SAM20

HF sensor head

Photocell Advance™

The cable length is around 30cm.

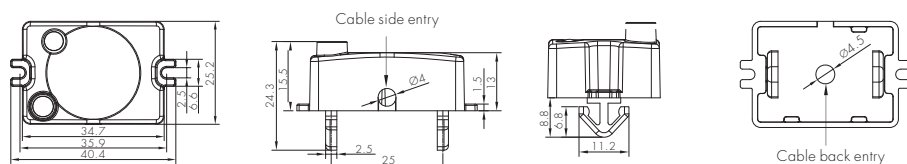


M. SAM21

HF sensor head

IP65

The cable length is around 30cm.

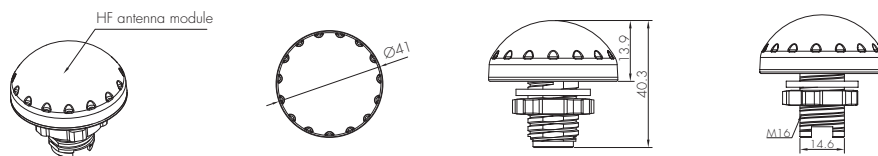


N. SAM22

HF sensor head

Flush mount

The cable length is around 30cm.

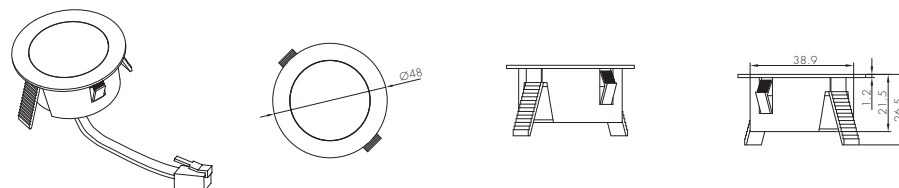


O. SAM22/AA

HF sensor head

Adjustable angle

The cable length is around 30cm.

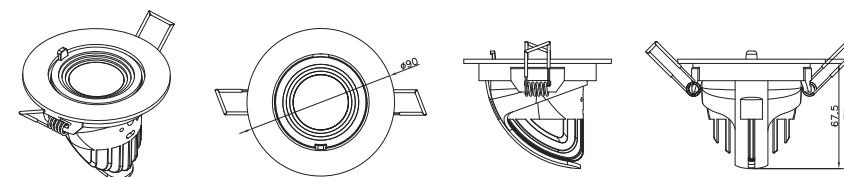


P. SAM23

HF sensor head

Photocell advance™

For highbay application

The cable length is around 30cm.


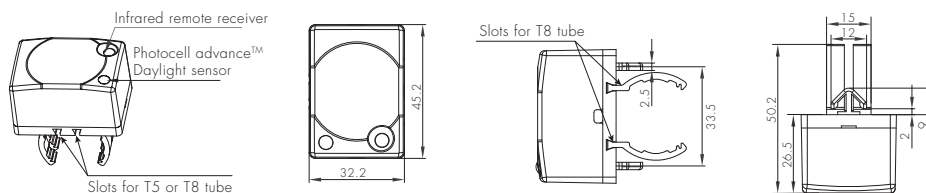


Optional Accessory: Reinforced Bluetooth Antenna



For some special applications, customers may need a larger Bluetooth transmission for both smartphone to device and device to device. Thanks to the reinforced Bluetooth antenna (optional black or white color to choose from), with it being added to the control base HC038V/BT & HCD038/BT, the transmission distance (smartphone to device) enlarges to 20m, the distance of device to device is around 50m.



HA01B

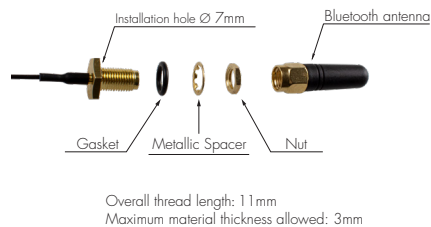

HA01W

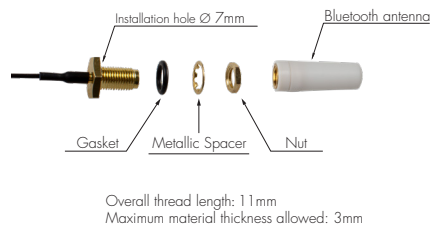

Installation Method



Solder the antenna to the Bluetooth module




Drill a 7mm hole in the fixture
Assemble the antenna parts in turn



Make sure the antenna head is outside the fixture


Detection Pattern

SAM23

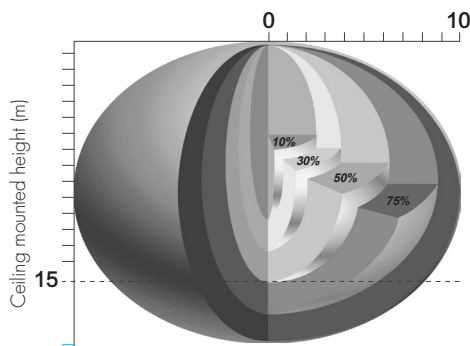

Ceiling mounted detection pattern (m)


SAM20 & SAM21 & SAM22

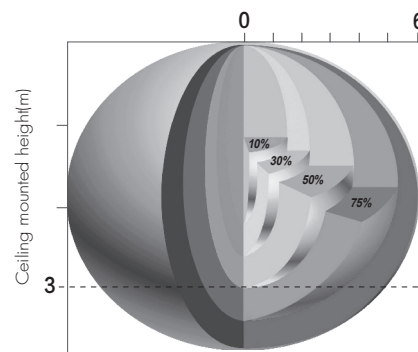


Ceiling mounted detection pattern (m)

Model SAM22/AA


Sensitivity set to maximum, Sensor head angle set to maximum

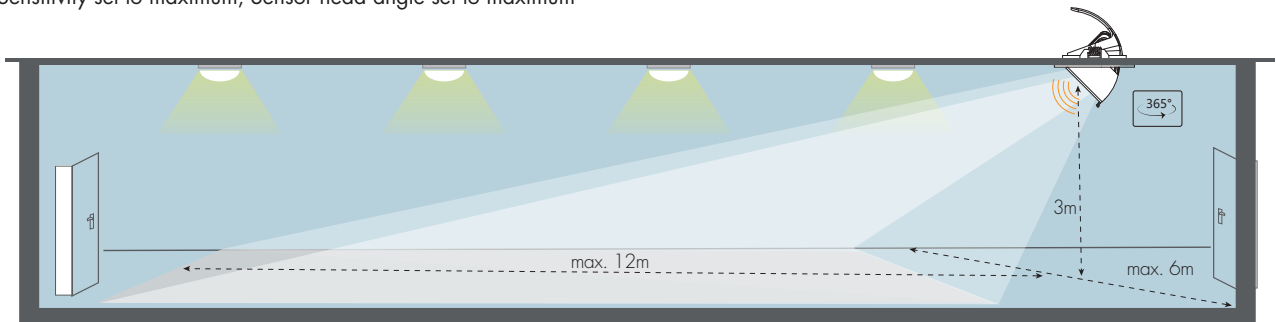


HIRO5 & HIRO5/FM & HIRO5/AA & HIRO7

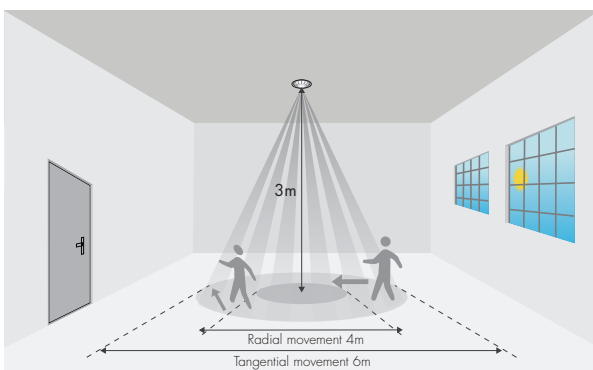


HIR12

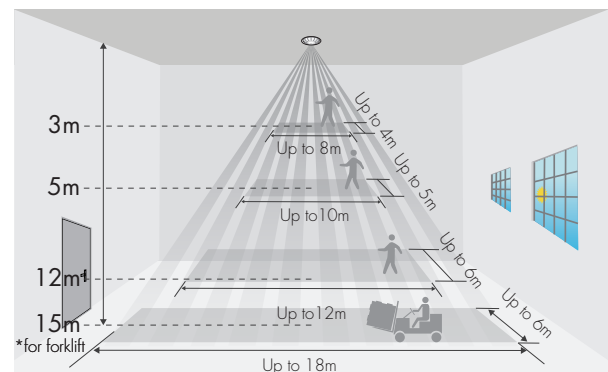

HIR63

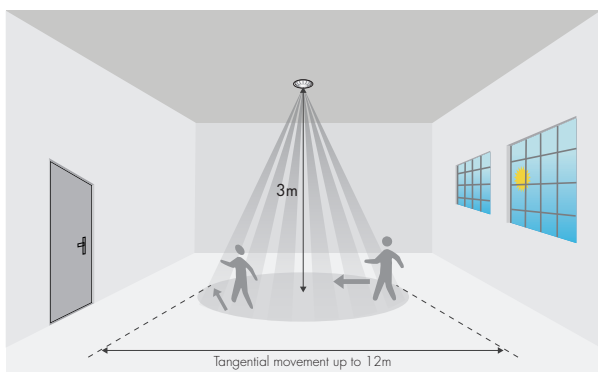

HIR63/R

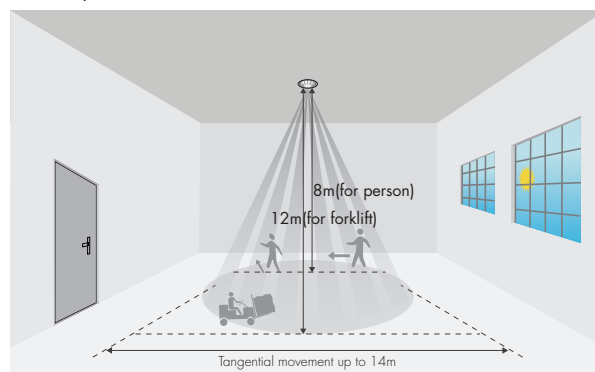


*The detection patterns are based upon 5km/h movement speed.

HIR11 (High-bay)




HIR11: High-bay lens detection pattern for forklift @ Ta = 20°C
(Recommended installation height **10m-15m**)

A: Tangential movement



B: Radial movement



Mount height

Tangential (A)

Radial (B)

10m

max 380m² (Ø = 22m)

max 201m² (Ø = 16m)

11m

max 452m² (Ø = 24m)

max 201m² (Ø = 16m)

12m

max 452m² (Ø = 24m)

max 201m² (Ø = 16m)

13m

max 452m² (Ø = 24m)

max 177m² (Ø = 15m)

14m

max 452m² (Ø = 24m)

max 133m² (Ø = 13m)

15m


max 452m² (Ø = 24m)

max 113m² (Ø = 12m)




HIR11: High-bay lens detection pattern for single person @ Ta = 20°C
(Recommended installation height **2.5m-12m**)

A: Tangential movement



B: Radial movement



Mount height

Tangential (A)

Radial (B)

2.5m

max 50m² (Ø = 8m)

max 7m² (Ø = 3m)

6m

max 104m² (Ø = 11.5m)

max 7m² (Ø = 3m)

8m

max 154m² (Ø = 14m)

max 7m² (Ø = 3m)

10m

max 227m² (Ø = 17m)

max 7m² (Ø = 3m)

11m

max 269m² (Ø = 18.5m)

max 7m² (Ø = 3m)

12m

max 314m² (Ø = 20m)

max 7m² (Ø = 3m)

Dimming Interface Operation Notes

Switch-Dim

The provided Switch-Dim interface allows for a simple dimming method using commercially available non-latching (momentary) wall switches. Detailed Push switch configurations can be set on Koolmesh app.

Switch Function	Action	Descriptions
Push switch	Short press (<1 second) * Short press has to be longer than 0.1 s, or it will be invalid.	- Turn on/off - Turn on only - Turn off only - Recall a scene - Quit manual mode - Do nothing
	Double push	- Turn on only - Turn off only - Recall a scene - Quit manual mode - Do nothing
	Long press (≥1 second)	- Dimming - Colour tuning - Do nothing
Sensor-link	/	- Upgrade a normal on/off motion sensor to a Bluetooth controlled motion sensor
Emergency Self-Test Function	Short press (<1 second) * Short press has to be longer than 0.1 s, or it will be invalid.	- Start Self test (Monthly) - Stop Self test - Start Self test (Annually) - Invalid
	Long press (≥1 second)	- Start Self test (Monthly) - Stop Self test - Start Self test (Annually) - Invalid
Fire Alarm (VFC signal only)	Refer to Koolmesh™ App User Manual V2.1	- Able to connect the Fire Alarm system - Once the fire alarm system is triggered, all the luminaries controlled by the Push Switch will enter the preset scene (normally it's full on), after the fire alarm system gives the ending signal, all the luminaries controlled by this Push Switch will revert back to normal status.

Additional Information / Documents

1. To learn more about detailed product features/functions, please kindly refer to <https://hytronik.com/product/hc038v-bt>
2. Regarding precautions for Bluetooth product installation and operation, please kindly refer to <https://hytronik.com/service/downloads> (Bluetooth Products Precautions for Product Installation and Operation)
3. Regarding precautions for Microwave sensor installation and operation, please kindly refer to: <https://hytronik.com/service/downloads> (Microwave Sensors Precautions for Product Installation and Operation)
4. Regarding precautions for PIR sensors installation and operation, please kindly refer to: <https://hytronik.com/service/downloads> (PIR Sensors Precautions for Product Installation and Operation)
5. Data sheet is subject to change without notice. Please always refer to the most recent release on <https://hytronik.com/products/system-level-components>
6. Regarding Hytronik standard guarantee policy, please refer to <https://hytronik.com/service/downloads> (Guarantee Conditions document)