

## IP65 DALI-2 PIR Zhaga book 18 Standard Motion Sensor

### HIR15/D2 (High-Bay)

DALI-2 output

# HYTRONIK®



#### Product Description

HIR15/D2 is an PIR motion sensor and compatible with the Zhaga book 18 standard. It is certified as DALI-2 input device with daylight sensor instance, to achieve dimming control and colour tuning. HIR15/D2 is also designed with a robust IP65 structure and suitable for high-bay applications as the capacity can be up to 12m installation height, which is ideal for the typical outdoor lamp (such as a streetlight).



**TYPE B**

#### Hardware Features



DALI bus power supply



D4i input device (Type B), support D4i driver and collect energy, fault & diagnostics data



IP65 design



Zhaga Book 18 standard



High-bay (up to 12m height)



5-year warranty

#### Technical Specifications

Input & Output Characteristics	
Operating voltage	12-36 VDC
Stand-by power	<0.5W
Quiescent current	10mA
Lux range	0~1023 lux
Output	DALI-2


Environment	
Operation temperature	Ta: -20°C ~ +50°C
Storage temperature	-40°C ~ +70°C
Relative humidity	10 ~ 90%
IP rating	IP65
Insulation	Class II

Sensor Data	
Sensor principle	PIR
Detection range*	Max installation height: 12m Max diameter: 20m
Detection angle	360°

\* Please use at the recommended operating temperature and relative humidity for better detection range.

Safety & EMC	
EMC standard (EMC)	EN55015, EN61547
Safety standard (LVD)	EN61347-1, EN61347-2-11
Certification	CE, UKCA
Compliance	RoHS Reach
DALI-2	IEC62386-101, 103, 303, 304 351


## Mechanical Structure & Dimensions

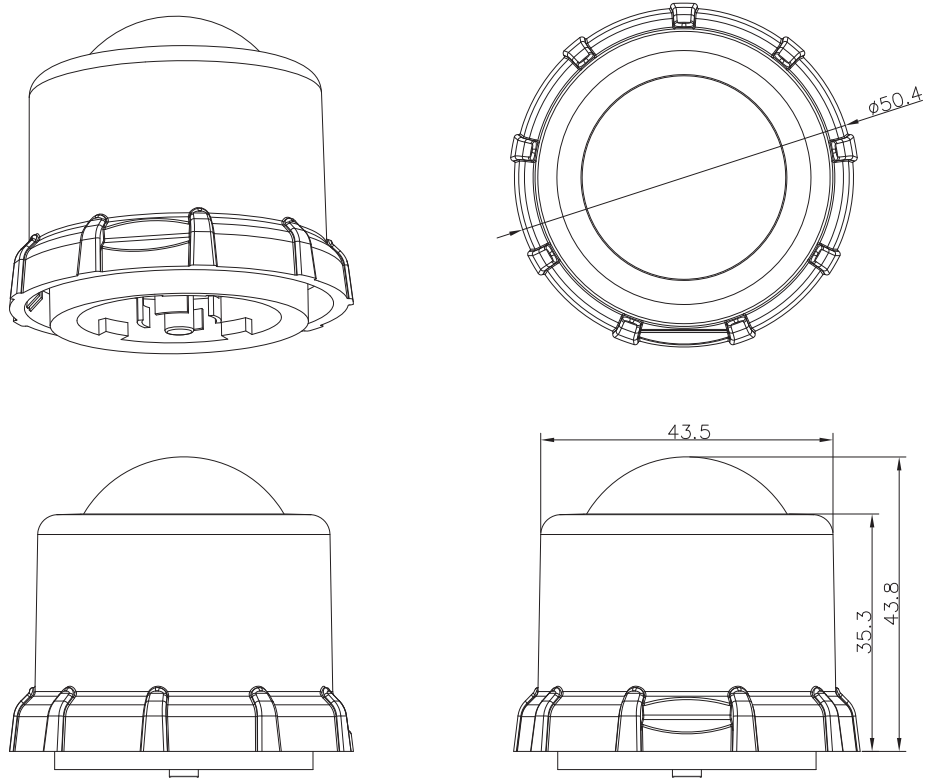

## Receptacle Accessory

The HA18SKT receptacle is designed to be compatible with the SAM15 and HIR15 series products. It provides a Zhaga Book 18 standard interface, suitable for roadway lighting, area lighting, and occupancy lighting applications.


## Mechanical Structure & Dimensions

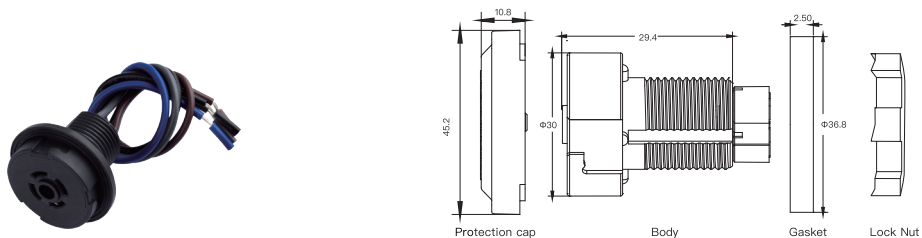


For more details, please refer to <https://hytronik.com/product/ha18skt>

Note: HA18SKT not included in the package.


## Wiring Diagram 1

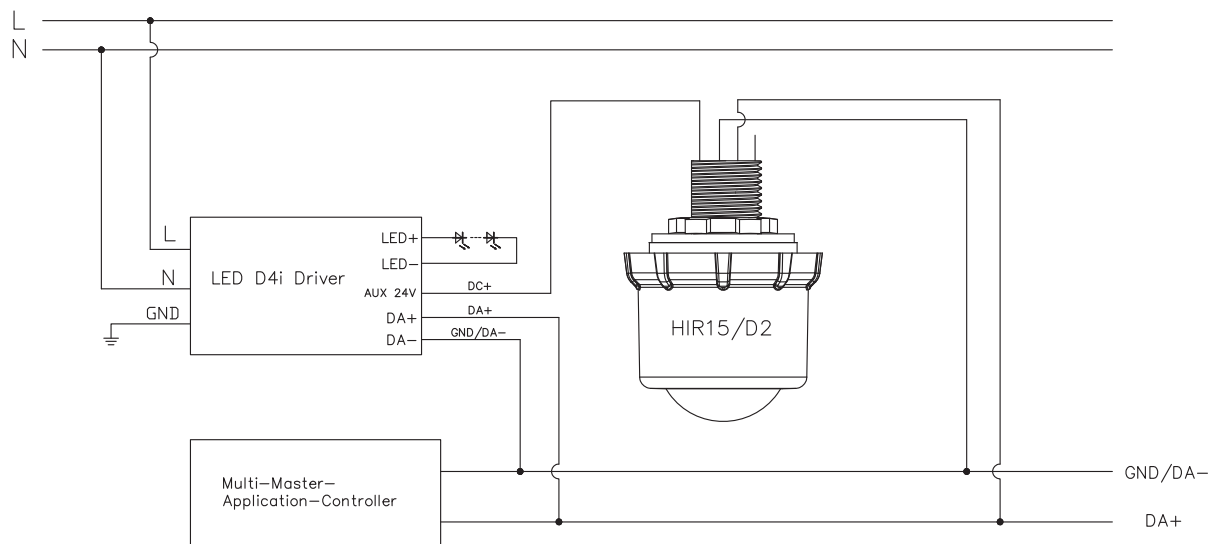


\*The total current on the DALI bus must be less than 250mA (when using D4i drivers on the DALI bus, if the total current exceeds 250mA, the DALI bus power supply can be shut down by sending a DALI command from a third-party DALI host).




## Wiring Diagram 2

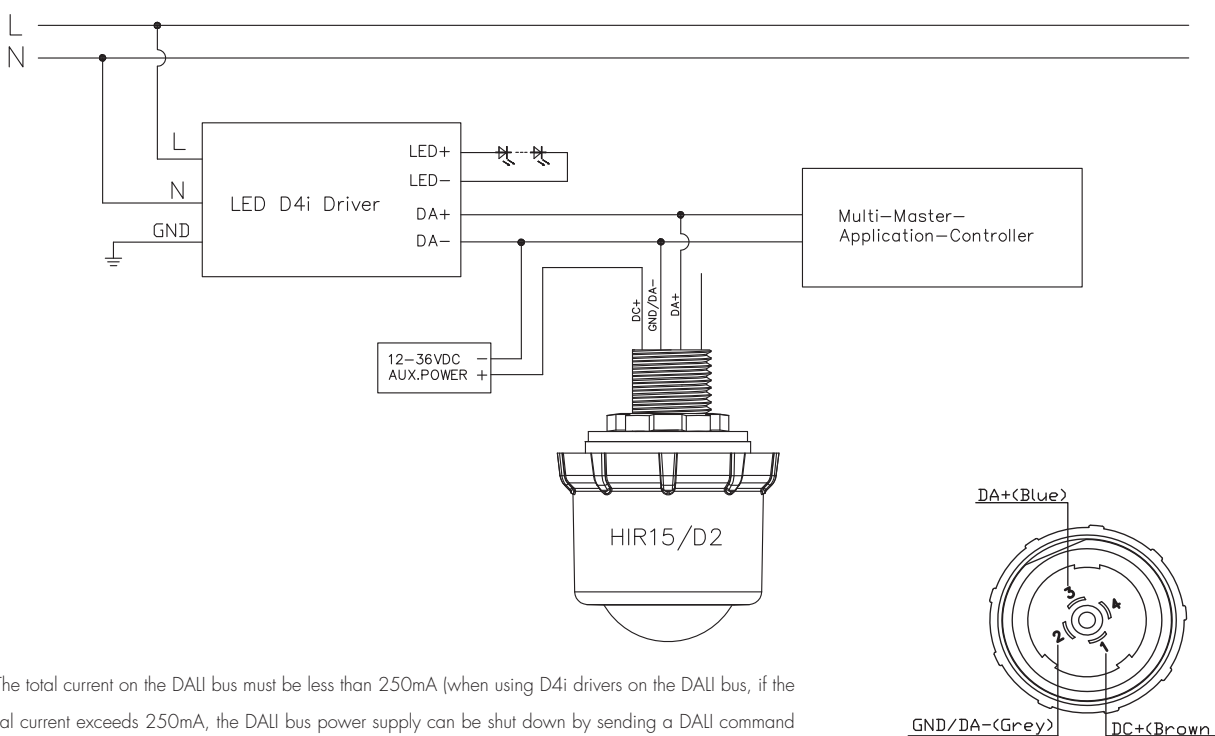


\*The total current on the DALI bus must be less than 250mA (when using D4i drivers on the DALI bus, if the total current exceeds 250mA, the DALI bus power supply can be shut down by sending a DALI command from a third-party DALI host).



### Wiring Diagram 3

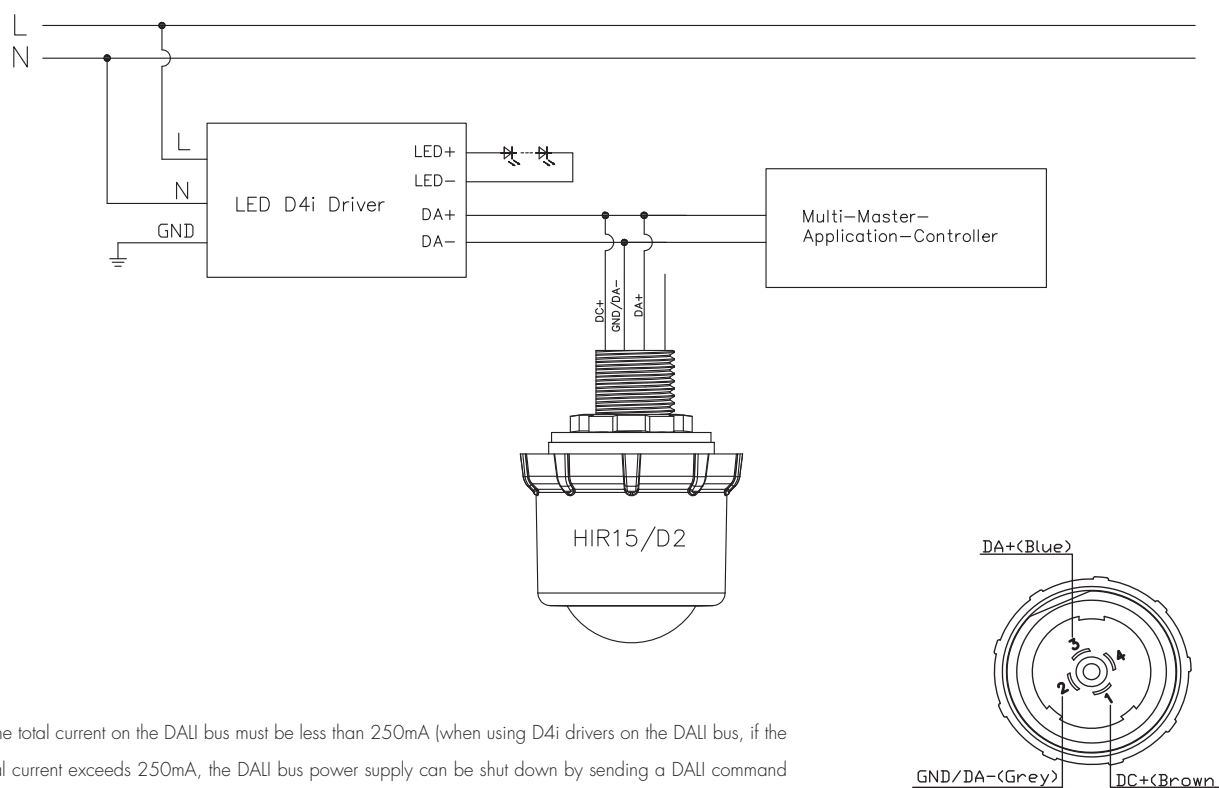


### Wiring Diagram 4


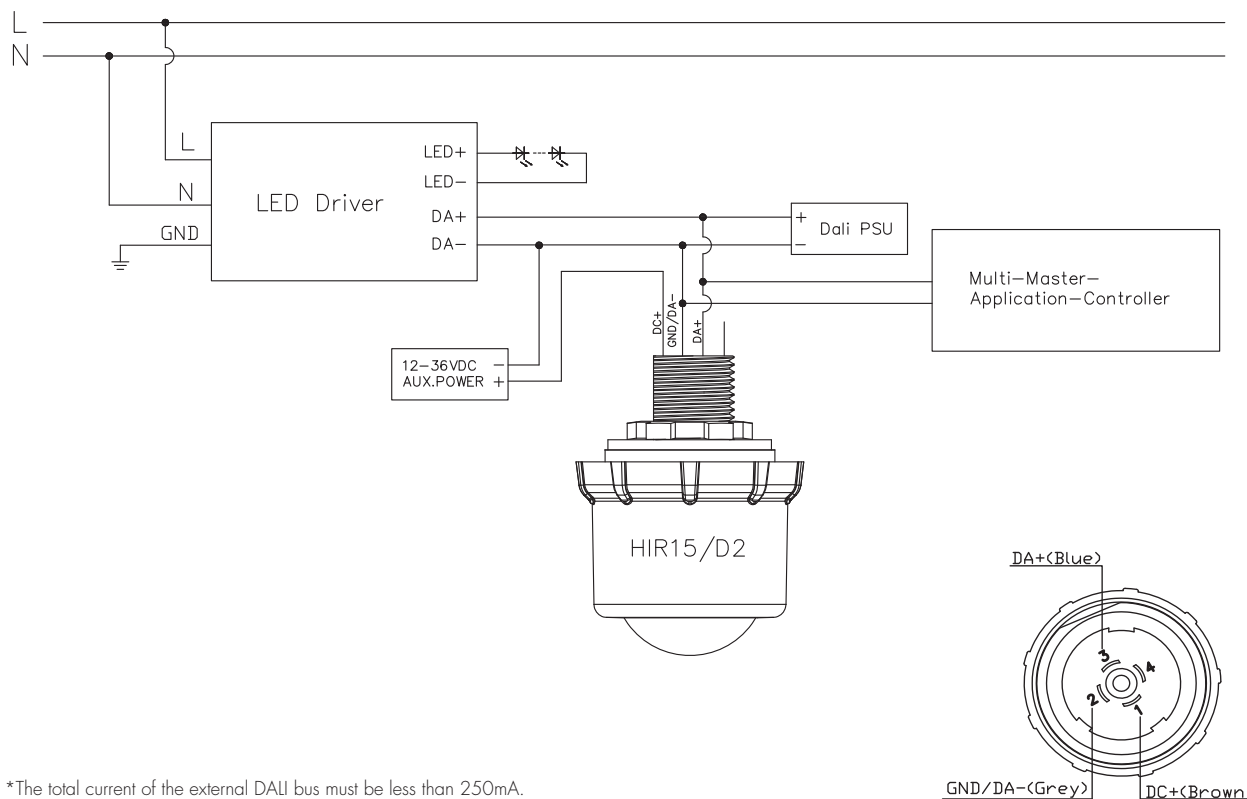


## Detection Range

The data below is tested under following conditions:

- Single person walking;
- Sensor not connected to any driver that may have soft-on period;
- The testing is conducted in an open and spacious indoor field, without
- noticeable obstacles or influences that may affect PIR performances.



A: Tangential movement	B: Radial movement	Mount height	Tangential Movement (A)	Radial Movement (B)
		3m	max 50m <sup>2</sup> (Ø = 8m)	max 13m <sup>2</sup> (Ø = 4m)
		5m	max 79m <sup>2</sup> (Ø = 10m)	max 13m <sup>2</sup> (Ø = 4m)
		8m	max 154m <sup>2</sup> (Ø = 14m)	max 13m <sup>2</sup> (Ø = 4m)
		12m	max 314m <sup>2</sup> (Ø = 20m)	max 13m <sup>2</sup> (Ø = 4m)

## Sensitivity Adjustment

The motion sensor only sends motion events. No further signals or commands will be sent. Sensor sensitivity ranges from 0 to 100%.

\*Values of "detectionRange" and "detectionSensitivity" shall have the following meaning:

- [0, 100]: 0-100%. 0 is the lowest detection range or detection sensitivity, 100 is the highest.
- 255: Adjustment not supported.

\*Set sensitivity: 0x26

\*Query sensitivity: 0x2B

Command name	Address byte	Instance byte	Opcode byte	DTR0	DTR1	DTR2	Answer	Send twice	See subclause	Command subclause
CATCH MOVEMENT	Device	Instance	0x20						9.4.6	11.7.2
SET HOLD TIMER (DTR0)	Device	Instance	0x21	✓				✓	9.5.1	11.8.3
SET REPORT TIMER (DTR0)	Device	Instance	0x22	✓				✓	9.5.2	11.8.4
SET DEADTIME TIMER (DTR0)	Device	Instance	0x23	✓				✓	9.5.3	11.8.5
CANCEL HOLD TIMER	Device	Instance	0x24						9.5.1	11.7.3

SET DETECTION RANGE (DTRO)	Device	Instance	0x25	✓				✓	9.5.7	11.8.6
SET SENSITIVITY (DTRO)	Device	Instance	0x26	✓				✓	9.5.7	11.8.7
QUERY INSTANCE CAPABILITIES	Device	Instance	0x29				✓		9.5.6	11.9.7
QUERY DETECTION RANGE	Device	Instance	0x2A				✓		9.5.7	11.9.8
QUERY SENSITIVITY	Device	Instance	0x2B				✓		9.5.7	11.9.9
QUERY DEADTIME TIMER	Device	Instance	0x2C				✓		9.5.3	11.9.3
QUERY HOLD TIMER	Device	Instance	0x2D				✓		9.5.1	11.9.4
QUERY REPORT TIMER	Device	Instance	0x2E				✓		9.5.2	11.9.5
QUERY CATCHING	Device	Instance	0x2F				✓		9.5.6	11.9.6

\*The valid value range is 0-100, 0-24 is the lowest sensitivity of the first gear, 25-49 is the second gear, 50-74 is the third gear, and 75-100 is the highest sensitivity of the fourth gear.

### Additional Information / Documents

1. To learn more about detailed product features/functions, please kindly refer to  
<https://hytronik.com/product/hir15-d2>
2. Regarding precautions for PIR Sensors installation and operation, please kindly refer to  
<https://hytronik.com/service/downloads> (PIR Sensors Precautions for Product Installation and Operation)
3. Data sheet is subject to change without notice. Please always refer to the most recent release on  
<https://hytronik.com/products/motion-daylight-sensors>
4. Regarding Hytronik standard guarantee policy, please kindly refer to  
<https://hytronik.com/service/downloads> (Guarantee Conditions document)