









Product Description

SAM15 is a Broadcast high-bay HF motion sensor with dimming, tunable white and daylight control. It includes Photocell Advance technology, using two photocells to differentiate natural from artificial light. Compatible with Zhaga Book 18 and DALI-2, it features an IP65 rating and 12m installation height, making it suitable for industrial and outdoor environments. All sensor parameters can be programmed through remote controller HRC-11, like adjusting sensitivity, time, lux level, and brightness settings.



Hardware Features

-  50mA DALI-2 Broadcast output
-  Support the control of DALI-2 and DT6/DT8 drivers
-  Photocell Advance™
-  Zhaga Book 18 standard
-  IP65 design
-  Robust HF antenna design wireless interference
-  High-bay (up to 12m height)
-  5-year warranty

Technical Specifications

Input & Output Characteristics	
Operating voltage	24VDC
Stand-by power	< 1W
Output	I guaranteed: 30mA
	I max: 50 mA
	U rated: 16VDC


Sensor Data	
Sensor principle	High Frequency (microwave)
Detection range*	Max installation height: 15m (forklift)
	12m (single person)
	Max detection range: ϕ 15m (forklift) ϕ 20m (single person)
Detection angle	360°
Lux range	0-1000Lux
Sensitivity	10% / 50% / 75% / 100%

* The detection range is heavily influenced by sensor placement (angle) and different walking paces. It may be reduced under certain conditions.

Environment	
Operation temperature	Ta: -20°C ~ +50°C
Storage temperature	Ta: -40°C ~ +70°C
Relative humidity	10 ~ 90%
IP rating	IP65
Insulation	Class II

Safety & EMC	
EMC standard (EMC)	EN61547, EN50015
Safety standard (LVD)	EN61347-1 EN61347-2-11
Certification	CE, UKCA
RED	EN300440, EN301489-1/-3 EN50663
Compliance	RoHS, Reach
DALI standard	IEC62386-101/103


Mechanical Structure & Dimensions

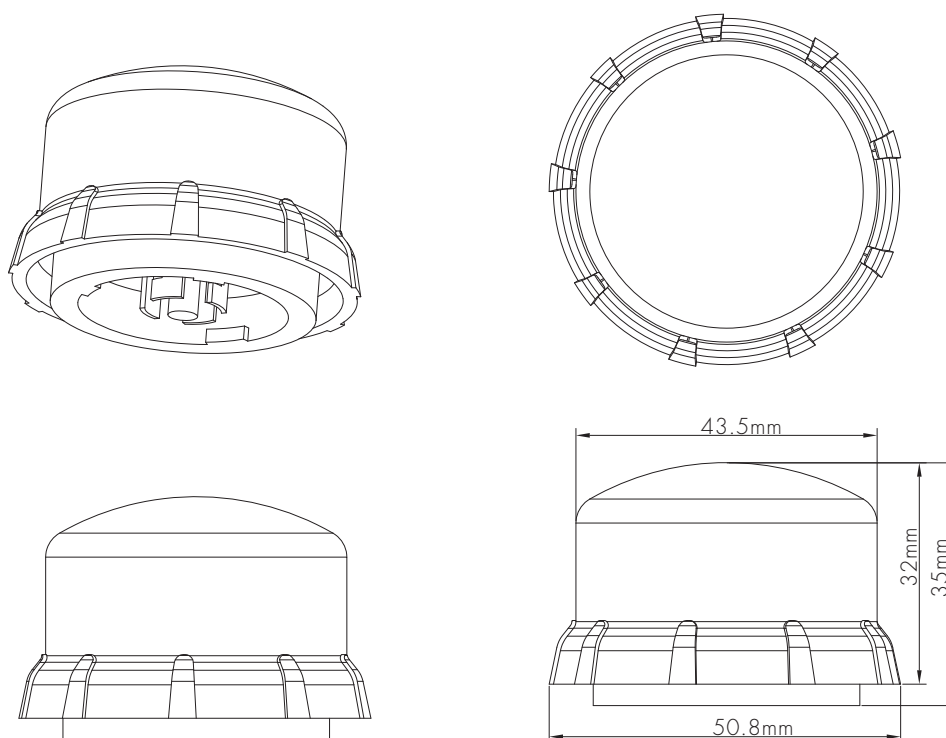

Receptacle Accessory

The HA18SKT receptacle is designed to be compatible with the SAM15 and HIR15 series products. It provides a Zhaga Book 18 standard interface, suitable for roadway lighting, area lighting, and occupancy lighting applications.


Mechanical Structure & Dimensions

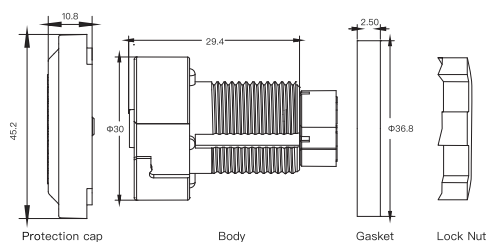

For more details, please refer to <https://hytronik.com/product/ha18skt>

Note: HA18SKT not included in the package.


Wiring Diagram Notes



- The total current on the DALI bus must not exceed 250mA.
- When using D4i drivers, if the total current exceeds this limit, a third-party DALI controller can shut down the DALI bus power supply via command.
- Multiple master devices should not be connected in parallel.
- Terminal block 4 is left unpopulated by default. No wiring required.


Wiring Diagram 1

Standard Driver with External AUX Power

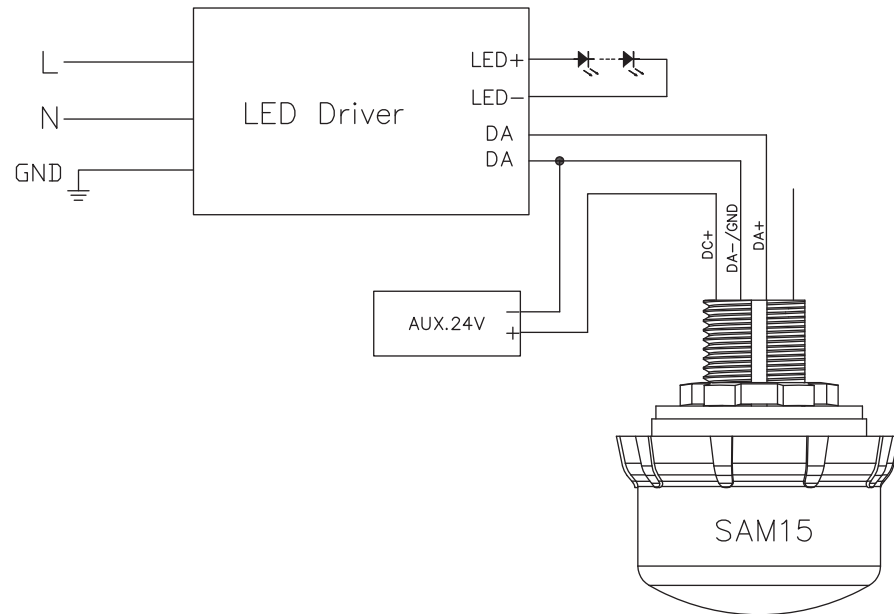


Wiring Diagram 2

D4i Driver with Common Negative

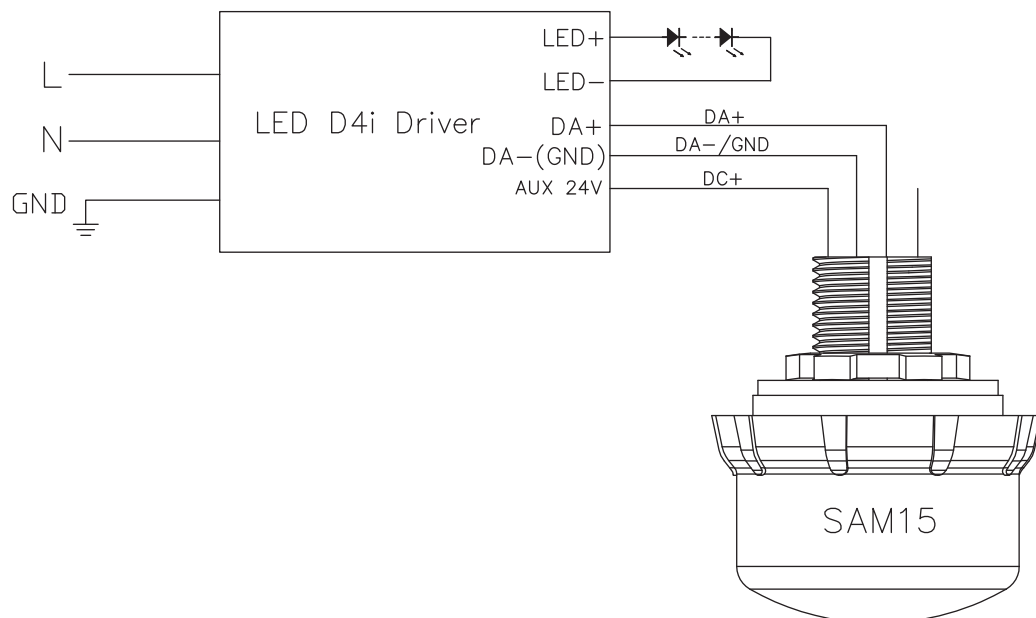

Wiring Diagram 3

D4i Driver with Isolated Negative

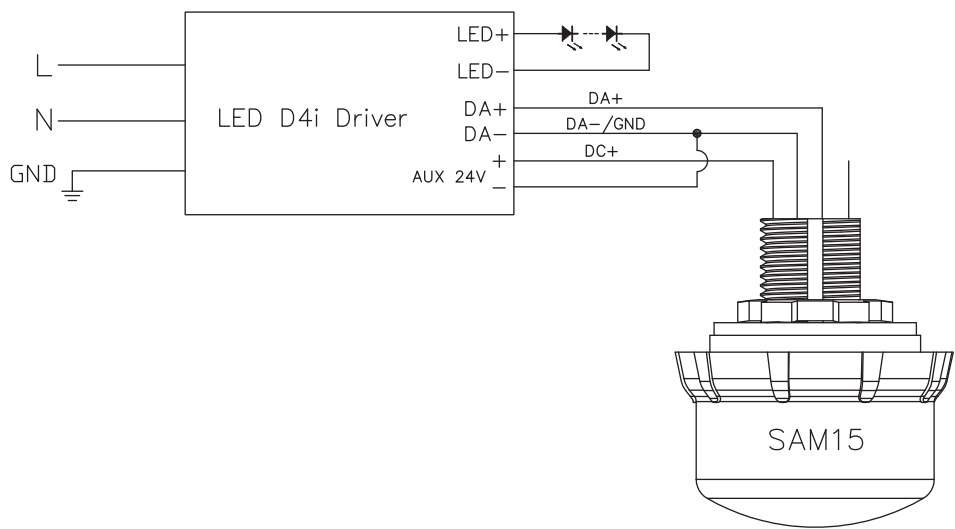


Detection Range

The data above is tested under following conditions:

- Single person walking;
- Sensor not connected to any driver that may have soft-on period;
- Testing temperature $T_a = 20^{\circ}\text{C}$;

The sensor detection area shown in this table is relevant for an empty space.

In areas with hard surfaces such as metal racking and/or glass corridors then the detection range can be extended from these internal reflections by up to 30%.

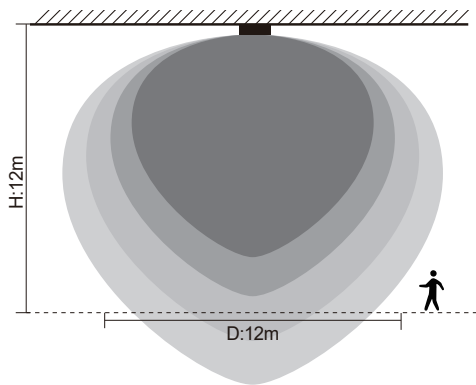


Height (m)	Sensitivity			
	100%	75%	50%	10%
Diameter (Ø:m)				
12	12	9	6	none
8	13	10	6	none
5	14	11	7	2
3	15	12	8	5

The data above is tested under following conditions:

- Forklift driving at a speed of 15km/h;
- Sensor not connected to any driver that may have soft-on period;
- Testing temperature $T_a = 20^{\circ}\text{C}$;

The sensor detection area shown in this table is relevant for an empty space.

In areas with hard surfaces such as metal racking and/or glass corridors then the detection range can be extended from these internal reflections by up to 30%.

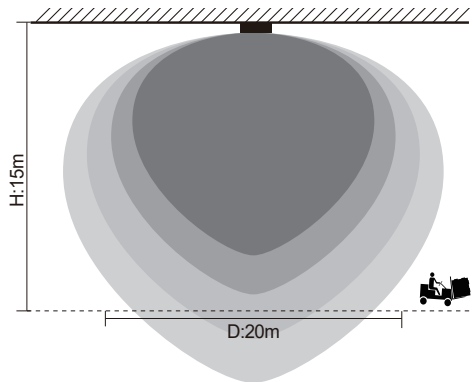


Height (m)	Sensitivity
	100%
15	Diameter (\varnothing : m)
	20

Robust HF Sensors Design – Anti-interference Technology




Hytronik's microwave motion sensor uses 5.8GHz high frequency (HF) antenna in the product design. With the increasing density of wireless environments such as 5G GSM tower and 5G Wi-Fi coverage, this has created extra challenges for sensor's operation because the air is shared by all kinds of wireless signals, and transmissions from any device at the similar frequency could potentially cause interference. The effects of interference which can be noticed by users are usually false triggering of sensors (turning on/off erratically), or lights staying on even after hold time etc.

To get around such tough environment, Hytronik has developed a new series of robust HF modules, designed to be loaded with our own special sophisticated software algorithms. These robust HF modules can withstand different types of wireless interferences in the real application. We believe this is the ultimate solution towards demanding installation environments in the future.

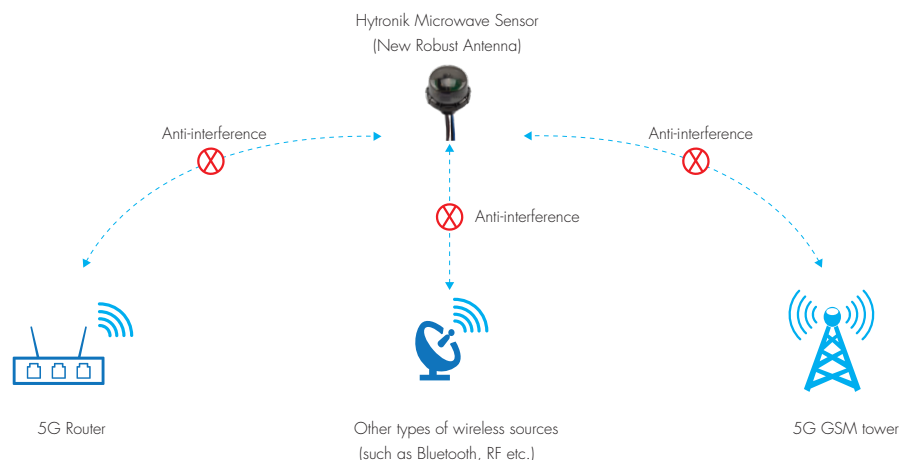


Settings (Remote Control HRC-11)

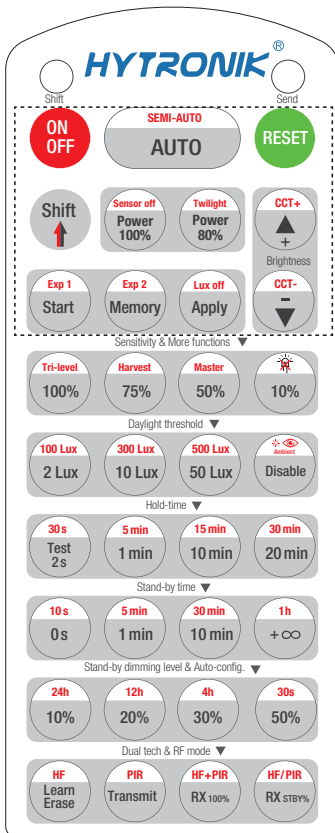

HRC-11

	Press button "ON/OFF" to select permanent ON or permanent OFF mode. * Press button "AUTO" / "RESET" to exit this mode.
	Press button "RESET", perform the latest DIP Switch/Rotary Switch settings. The default settings are: Auto mode; DALI Master mode; Detection range 100%; Hold-time 5min; Daylight sensor disable; Stand-by time 10min; Stand-by dimming level 20%; Maximum Brightness & Color turning; LED indication off; Lux off activated; HFDetection mode.
	Press button "Shift", the LED on the top left corner is on to indicate mode selection. All values / settings in RED are valid for 20 seconds.
AUTO	Press button "AUTO" to initiate automatic mode. The sensor starts working and all settings remain as before the light is switched ON/OFF;
SEMI-AUTO	This key is not applicable on this product.
Power 100% 80%	Press buttons in zone "Power out" to select the light output at 80% (at initial 10,000 hours) or 100%.
Sensor off Twilight	1. Press button "Shift", the red LED on. 2. Press button "Sensor off", the function of movement detection is disabled, the function of photocell is also disabled. OR Press button "Twilight", the function of movement detection is disabled, but the function of photocell is still working, and the product becomes a pure dusk/ dawn daylight sensor. To exit from "Sensor off"/"Twilight" mode, press button "AUTO"/"SEMI-AUTO"/"RESET".
	Press these two buttons to adjust the light output brightness and set a new target lux level. The daylight sensor can measure ambient daylight level and ignore the LED light, so as to calculate how much artificial light is needed to maintain the target lux level.
CCT+ CCT-	1. Press button "Shift", the red LED on. 2. Press "CCT+" or "CCT-" button to adjust colour turning.
Start Memory Apply	1. Press button "Start" to program. 2. Select the buttons in "Detection range", "Daylight threshold", "Hold-time", "Stand-by time", "Stand-by dimming level" to set all parameters. 3. Press button "Memory" to save all the settings programmed in the remote control. 4. Press button "Apply" to set the settings to each sensor unit(s). <i>For example, to set detection range 100%, daylight threshold Disable, hold-time 5min, stand-by time +∞, stand-by dimming level 30%, the steps should be:</i> <i>Press button "Start", button "100%", "Disable", "Shift", "5min", "Shift", "+∞", "30%", "Memory". By pointing to the sensor unit(s) and pressing "Apply", all settings are passed on the sensor(s).</i>
Lux off	The "Lux off" function is activated as default. When the ambient lux level exceeds the target level continuously for more than 5 minutes, the lights will be turned off. In AUTO /SEMI-AUTO/Twilight modes, to disable "Lux off": 1. Press "Shift" button first, the red LED on. 2. Press "Lux off" button, the "Lux Off" function will be deactivated. The lights will not turn off even when the ambient lux level exceeds the target lux level but will dim down the brightness to the stand-by time level. <i>For Sensor LED indicator references: 1.Fast flash 1s, "Lux off" function activated. 2.Remains on 2s, "Lux off" function deactivated.</i>
Exp 1 Exp 2	"Exp" refer to Expansion, these two buttons are reserved functions and pending future development.

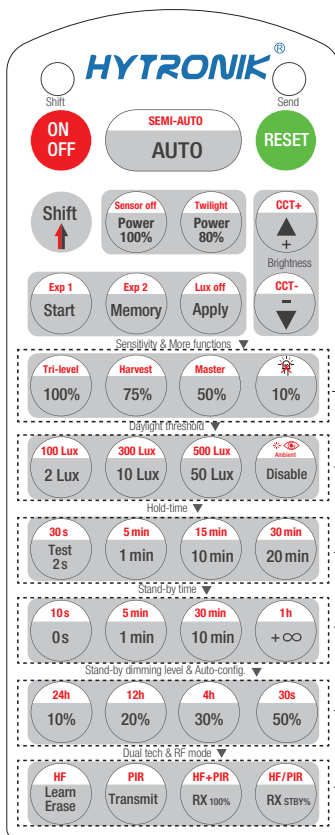

HRC-11

Sensitivity & More functions	
100% 75% 50% 10%	In AUTO /SEMI-AUTO modes, press buttons in zone “Detection range” to set detection range at 100%/75%/50%/10%.
Tri-level Harvest	1.Press button “Shift”, the red LED on. 2. Press buttons “Tri-level” or “Daylight harvest” to shift between Tri-level control mode and Daylight harvest mode.
Master	1.Press button “Shift”, the red LED on. 2. Press button “Master” to select a DALI sensor in a DALI line to be a “master”, so that all other DALI sensors in the same DALI line will perform daylight harvesting/tri-level control based on the lux reading from this “master” sensor’s daylight sensor.
Daylight threshold	
2 Lux 100 Lux 10 Lux 300 Lux 50 Lux 500 Lux Disable	Press buttons in zone “Daylight threshold” to set daylight sensor at 2Lux/ 10Lux / 50Lux / 100Lux / 300Lux/500Lux / Disable. <i>Note: To set daylight sensor at 100Lux / 300Lux/500Lux , press “Shift” button first.</i>
Ambient	1. Press button “Shift”, the red LED on. 2. Press button “Ambient”, the surrounding lux level is sampled and set as daylight threshold / target Lux level.
Hold-time mode	
Test 2s 30s 1min 5min 10min 15min 20min 30min	In AUTO /SEMI-AUTO modes, press buttons in zone “hold-time” to set the hold-time at 2s / 30s / 1min / 5min / 10min / 15min / 20min / 30min. <i>Note: 1. To set hold-time at 30s / 5min / 15min / 30min, press “Shift” button first. 2. 2s is for testing purpose only, stand-by period and daylight sensor settings are disabled in this mode. *To exit from Test mode, press button “RESET” or any button in “Hold-time”.</i>
Stand-by time mode	
0s 10s 1min 5min 10min 30min +∞ 1h	Press buttons in zone “stand-by time” to set the stand-by period at 0s / 10s / 1min / 5min / 10min / 30min / 1h / +∞. <i>Note: 1. To set stand-by-time at 10s/ 5min / 30min / 1h, press “Shift” button first. 2. “0s” means on/off control; 3. “+∞” means bi-level control, the fixture is 100% on when there is motion detected, and remains at the stand-by dimming level when no presence after motion hold-time. Only when the stand-by time is set in “+∞” and the ambient lux level is below the target lux level, the lux will auto-on.</i>
Stand-by dimming level & Auto-config.	
10% 20% 30% 50%	Press the button in zone “stand-by dimming level” to set the stand-by dimming level at 10% / 20% / 30% / 50%.
24h 12h 4h 30s	1.Press button “Shift”, the red LED on. 2.Select a time period and the sensor will do light level measurement and determine/save the lowest light level (commission line) with 100% light on, so as to set the target lux level automatically. <i>Note:1.Make sure the light level measurement covers the night time. 2.The fixture will go into sensor mode after the measurement, all sensor setting remain unchanged.</i>
Dual tech & RF mode	
Learn Erase Transmit	This key is not applicable on this product.
RX 100% RX STBY%	This key is not applicable on this product.
HF PIR HF+PIR HF/PIR	This key is not applicable on this product.

Additional Information / Documents

1. To learn more about detailed product features/functions, please kindly refer to
<https://hytronik.com/product/sam15>
2. Regarding precautions for Microwave sensor installation and operation, please kindly refer to
<https://hytronik.com/service/downloads> (Microwave Sensors Precautions for Product Installation and Operation)
3. Data sheet is subject to change without notice. Please always refer to the most recent release on
<https://hytronik.com/products/motion-daylight-sensors>
4. Regarding Hytronik standard guarantee policy, please kindly refer to
<https://hytronik.com/service/downloads> (Guarantee Conditions document)