

# Installation and Instruction Manual

**HYTRONIK**®

## Bluetooth® Kinetic Switch

A three-gang Switch

**HBKS03**

### 1. Technical Specifications





Operation frequency	2.4 GHz ~ 2.483 GHz
Transmission power	-5 dBm
Range (Typical indoor)	10~30m
Protocol	Bluetooth®
Power supply	Self-powered (kinetic energy)
Lifetime	100,000 actuation (switching cycles)
Housing material	PC
Dimensions (L x W x H)	86x86x15mm
Operation temperature	Ta: -10°C ~ +40°C
Switch pressing force	≈ 700g (reference only, individual variations exist)
IP rating	IP20

⚠ Note: Bluetooth transmission performance may be affected by various factors, including but not limited to the force applied to buttons during operation (which may impact power supply stability) and actual environmental conditions such as electromagnetic interference and physical obstructions.



### 2. Download the App

Free App for set-up and commissioning

**Bluetooth®**





Smartphone app for both iOS & Android platform



for iPad

Koolmesh Pro app for iPad




for Web

Web app/platform: [www.iot.koolmesh.com](http://www.iot.koolmesh.com)

### 3. Installation

Mechanical Structure & Dimensions

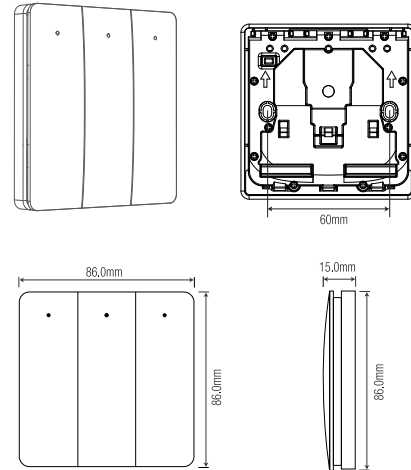

QR code scanning via **Koolmesh**® app

\*Use camera to scan and add




**HYTRONIK**®

HBKS03-20250424-A1

### Optional Accessories For Switch Bezel


The Switch Bezel is an accessory for Hytronik kinetic switches in Basalt Grey. It enhances accessibility, especially for those with impaired vision or limited hand mobility. Compliant with the UK's Part M regulations, it ensures safe and easy usage for everyone.

HAKS01/W, HAKS01/B (size:mm)



For the installation of a single switch


HAKS02/W, HAKS02/B (size:mm)



For the installation of double switches


#### Method 1: Adhesive Mounting

\*If the wall surface is clean and smooth, directly peel off the double-sided adhesive tape and stick the switch to the wall.

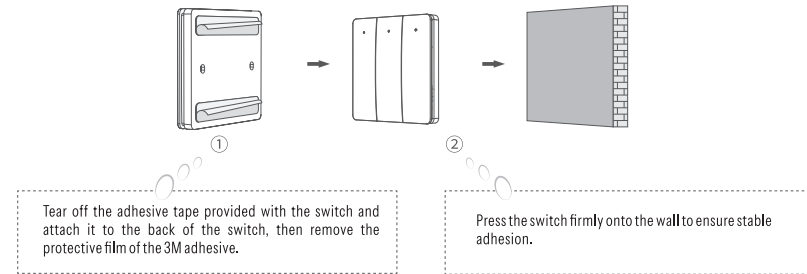

#### Method 2: Installation with Original Switch Box

\*If prefer to install it on the original switch box, use screws for installation.

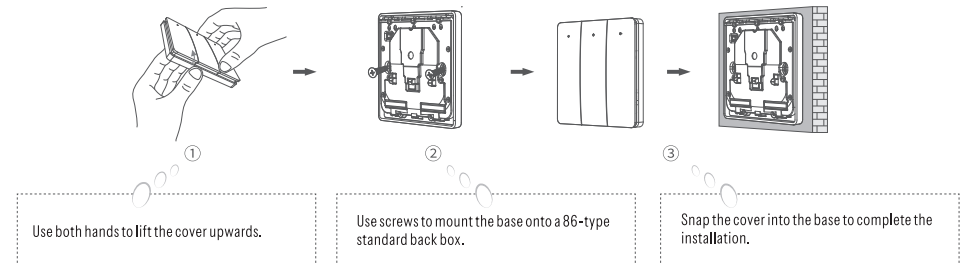


⚠ Note: Please control the screw tightening torque during assembly (recommended ≤ 0.1 N·m) to avoid panel deformation caused by uneven stress, which may affect button feel or function. Proper torque ensures both structural stability and appearance quality.

**HYTRONIK**®

HBKS01D-20250424-A1

Method 3: Installation with Switch Bezel

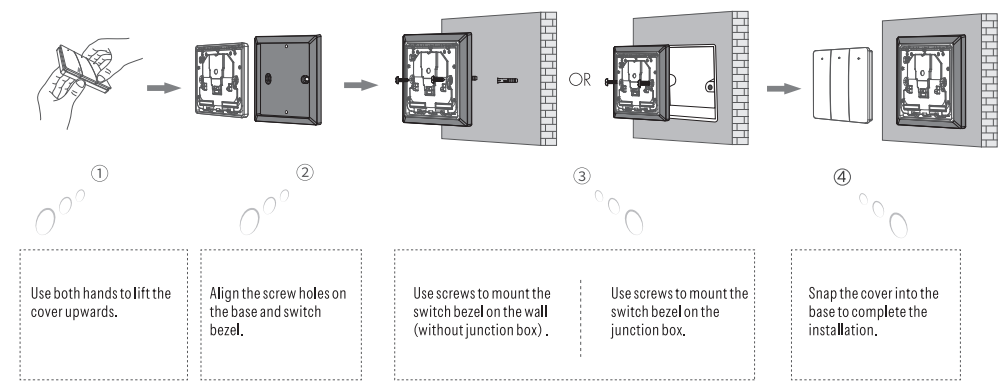

4. Dimming Interface Notes

Detailed Push switch configurations can be set on Koolmesh app.

Switch Function	Action	Descriptions	
Push switch	Short press (<1 second) * Short press has to be longer than 0.1s, or it will be invalid.	- Turn on/off - Turn on only - Turn off only	- Recall a scene - Quit manual mode - Do nothing
	Long press (≥1 second)	- Dimming - Colour tuning (Warm to Cool White) - Do nothing	

5. Additional Information / Documents

1. To learn more about detailed product features/functions, please kindly refer to <https://hytronik.com/product/hbks03-w>
2. Regarding precautions for Bluetooth product installation and operation, please kindly refer to <https://hytronik.com/service/downloads> ( Bluetooth Products Precautions for Product Installation and Operation )
3. Data sheet is subject to change without notice. Please always refer to the most recent release on <https://hytronik.com/products/system-level-components>
4. Regarding Hytronik standard guarantee policy, please refer to <https://hytronik.com/service/downloads> ( Guarantee Conditions document )