

# HAKS02/W

Switches Plastic Bezel | Dual Mounting | White Color



## Benefits

Visual Contrast: The raised surroundings make it easy to notice and approach

Flexibility: Dual Mounting Capability for two switches side by side

User-friendly: Simple installation and removal

## Applications

Dual Mounting: Suitable for 1+1 switches

Offices, Classrooms

Healthcare

Check Out the Complete System Solution on the Website:  
<https://www.hytronik.com/product/HAKS02-W>



## Product Description

White plastic bezel designed for Hytronik HBKS series switches, for easy and convenient wall installation.


Specifications

| Technical      |          |
|----------------|----------|
| Product weight | 71.0 g   |
| Product height | 11.8 mm  |
| Product length | 187.3 mm |
| Product width  | 101.3 mm |
| Mounting hole  | 4.1 mm   |

# HAKS02/W

Switches Plastic Bezel | Dual Mounting | White Color


## Technical Drawing

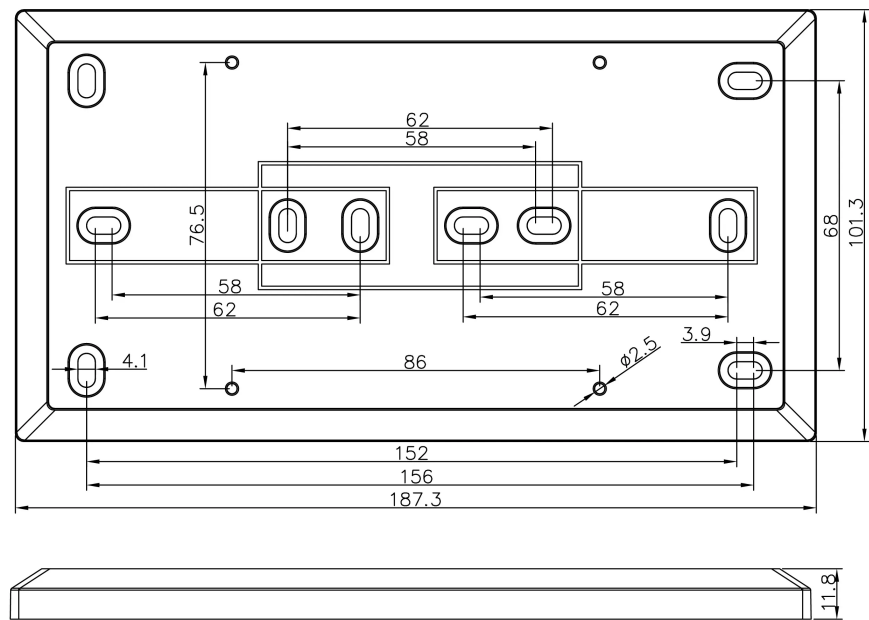

# HAKS02/W

Switches Plastic Bezel | Dual Mounting | White Color

## Installation Process

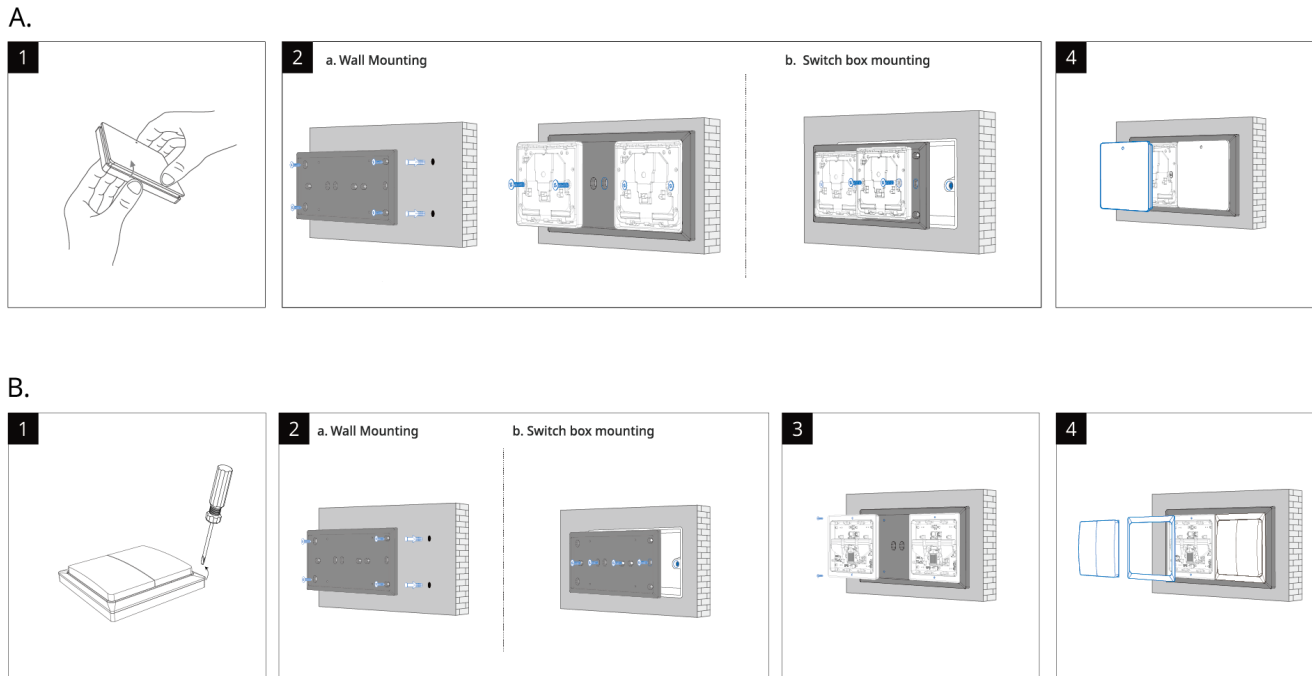

## Detailed Installation Instructions

### Method A. Installation steps with HBKS01, HBKS02, HBKS03

1. Use both hands to lift the cover upward and remove it from the base.
2. Select the appropriate mounting method:  
**a: For wall mounting:**  
a1: Use Ø4.0×20mm screws to mount the HAKS02 onto the wall.  
a2: Use Ø4.0×30mm screws to fix the aligned switch rear panel onto the HAKS02.  
**b. For switch box mounting:**  
Use Ø4.0×30mm screws to fix the aligned switch and HAKS02 onto the switch box.
3. Snap the cover back onto the base to complete the installation.

### Method B. Installation steps with HBKS01D, HBKS02D

1. Use a prying tool or screwdriver to carefully lift and open the switch bezel.
2. Select the appropriate mounting method:  
**a. For wall mounting:**  
Use Ø4.0×20mm screws to fix HAKS02 onto the wall.  
**b. For switch box mounting:**  
Use Ø4.0×30mm screws to fix HAKS02 onto the switch box.
3. Attach the switch backplate to the installed HAKS02 and secure it properly.
4. Snap the cover back onto the base to complete the installation.

## Commissioning Instructions and Precautions

### Notes for Method B

1. Please control the screw tightening torque during assembly (recommended 0.1 N·m) to avoid panel deformation caused by uneven stress, which may affect button feel or function. Proper torque ensures both structural stability and appearance quality.
2. Remove the switch when the installation is completed: At the accessory groove, use a pry tool or a Ø3mm screwdriver to gently lift and remove the border. This will expose the two screw holes from installation step 3, enabling future disassembly or replacement.

**Warning:** For additional important documents, including installation precautions, product guidelines, and guarantee conditions, please refer to the official downloads.

<https://hytronik.com/service/downloads>

# HAKS02/W

Switches Plastic Bezel | Dual Mounting | White Color

## Options

### Compatible products (for full functionality)



#### **HBKS01/W**

Bluetooth Kinetic Switch | One-gang | Wireless Control  
[www.hytronik.com/product/HBKS01-W](http://www.hytronik.com/product/HBKS01-W)



#### **HBKS02D/W**

Bluetooth Kinetic Switch | Double Rocker | White Color  
[www.hytronik.com/product/HBKS02D-W](http://www.hytronik.com/product/HBKS02D-W)



#### **HBKS01D/W**

Bluetooth Kinetic Switch | Single Rocker | White Color  
[www.hytronik.com/product/HBKS01D-W](http://www.hytronik.com/product/HBKS01D-W)



#### **HBKS03/W**

Bluetooth Kinetic Switch | Three-gang | White Color  
[www.hytronik.com/product/HBKS03-W](http://www.hytronik.com/product/HBKS03-W)



#### **HBKS02/W**

Bluetooth Kinetic Switch | Two-gang | White Color  
[www.hytronik.com/product/HBKS02-W](http://www.hytronik.com/product/HBKS02-W)